

Two Solid Swing Door BackBar

Range: BackBar

SKOPE ID: BB002S

Dimensions: 1485 mm (W) × 590 mm (D) × 1025 mm (H)*

Capacity: 410 L

* Height with castors is adjustable from 1015 to 1035.

Project: _____

Item #: _____



A solid door under-bar fridge designed to merchandise ready-to-serve cold beverages and food in bars, restaurants, clubs, pubs, and cafés. With M1 compliance it is engineered to serve cold food and drinks at 1°C to 4°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty




Natural Refrigerant



GEMS



SKOPE-connect

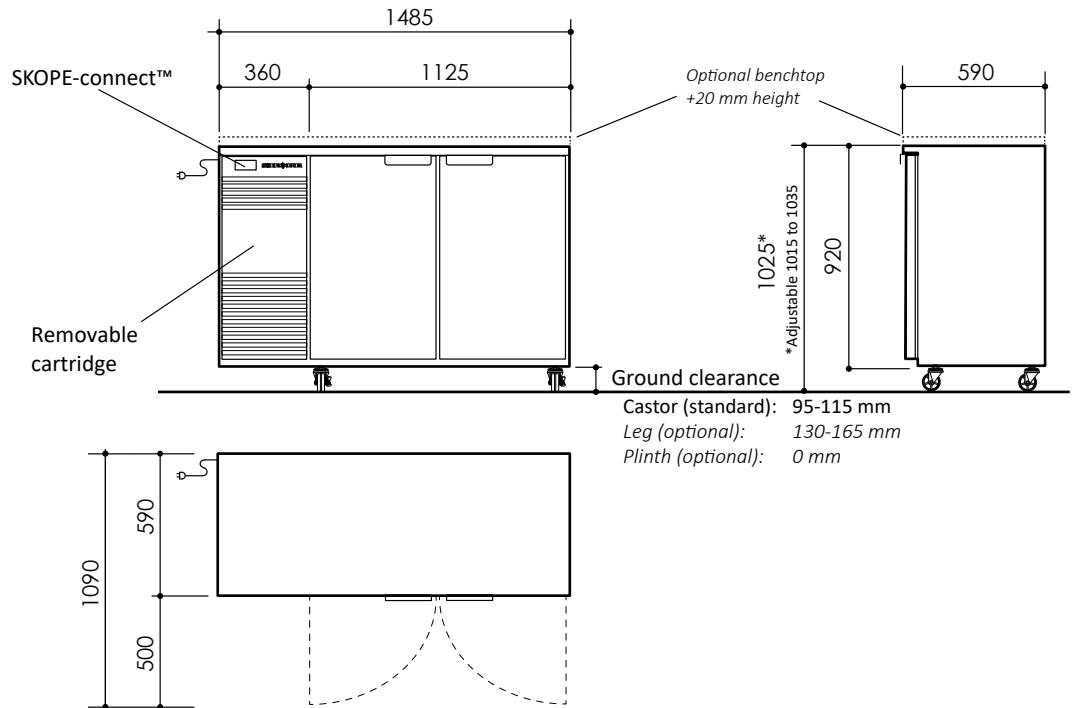

Cabinet

| | |
|-------------------|--|
| Type | BackBar |
| Finish | Powder-coated galvanised steel or stainless steel |
| Insulation | Type: PU foam |
| | Thickness (mm): 50 |
| | Blowing Agent: Cyclo-iso pentane (C5H10/C5H12) |
| Doors | Type: Solid swing door (l) |
| | Opening Size: Height (mm) 730, Width (mm) 460 |
| Shelving | Four adjustable height powder-coated wire shelves 4 × outer shelf (497W × 440D) |
| Lighting* | 1 × 16 W dimmable, cool white (5500-6500K) LED strip on cabinet ceiling |

Dimensions†

| | External | Internal | Packed |
|----------------------------------|---------------------------------|----------|--------|
| Width (mm) | 1485 | 1020 | TBC |
| Depth (mm) | 590 | 530 | TBC |
| Height (mm) | 1015 to 1035 (standard castors) | 758 | TBC |
| | 920 (plinth mount) | | |
| Weight (kg) | 180 | | TBC |
| Capacity (L) | 410 | | |
| Footprint (m²) | 0.88 | | |

Ventilation (mm)

| Top | Sides | Rear |
|--------------|--------------|--------------|
| Not required | Not required | Not required |

Product Loading

| Facing | 330 ml can | 28 | 600 ml bottle | 28 |
|----------------|------------|-----|---------------|-----|
| Loading | 330 ml can | 168 | 600 ml bottle | 168 |

* Accessible via the free SKOPE-connect™ app.

† Allow for dimensional tolerances when installing the cabinet(s).

Performance

| | |
|---|-----------------------------------|
| Product Temperature Range (°C) | 1 to 4 (adjustable* from 0 to 15) |
| Maximum Ambient Temperature (°C) | 40 |
| Sound Level (dB(A)) | Standard < 66 |
| | Hush Mode* < 62 |

Greenhouse and Energy Minimum Standards (GEMS)

| | |
|----------------------------------|----------------------|
| Star Rating | 6 |
| Product Temperature Class | M1 (-1 to 5°C) |
| Total Energy Consumption | 1.87 kWh/24 h |
| Annual Running Costs | \$205 (@ \$0.30/kWh) |

Electrical

| | |
|-------------------------|--|
| Supply | 220-240 volts a.c., 50 Hz, single phase supply |
| Cord | 1.9 power cord with 3-pin, 10 amp plug |
| Current draw (A) | 2.6 |

Refrigeration

| | |
|------------------------------|---|
| Controller | SCS Connect (SKOPE-connect™ compatible) |
| System Type | Removable cartridge |
| Cartridge Weight (kg) | 24 |
| Refrigerant/Charge | R290/81 g |
| Nominal Capacity (W) | 650 |
| Heat Rejection (W) | Average 80 Peak 90 |
| Defrost Type | Automatic, off-cycle |
| Drainage | No plumbing required |



BB.2.SSW
on the SKOPE website