


specifications

CL400r-2SW

Counterline, 2 Door (Swing), Remote Fridge


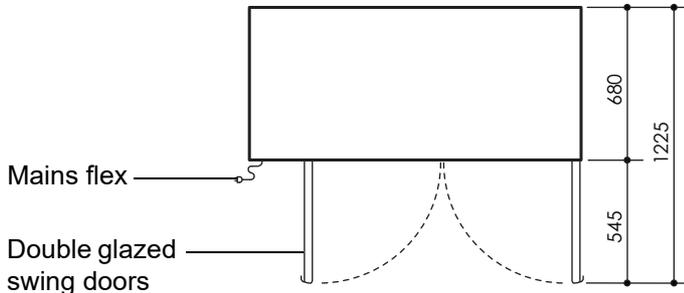


CABINET DIMENSIONS

	External	Internal
Height	725mm*	545mm
Width	1455mm	1120mm
Depth	680mm**	565mm
Floor area	0.99m ²	
Gross volume	390L	

* Height excludes castors, legs or optional worktop

**Depth with optional worktop is 700mm

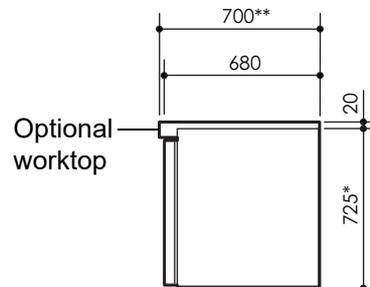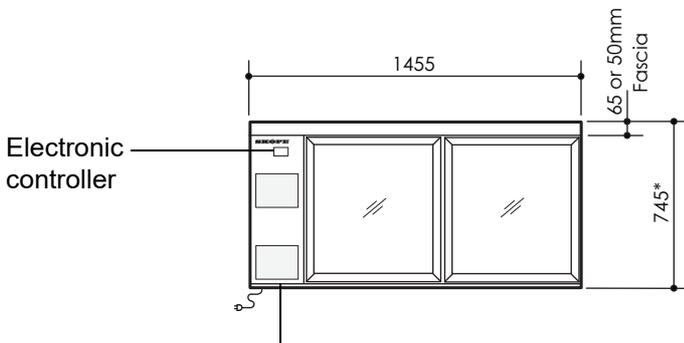

Side mounted remote refrigeration unit

CABINET SPECIFICATIONS

Doors	Self-closing, double glazed, toughened Low-E safety glass with aluminium extrusion or insulated solid doors
Internal door opening size	2 door openings: 544mm high x 520mm wide
Shelves	Adjustable height, white plastic coated, steel wire shelves - two per door
Worktop (optional)	Optional 20mm high stainless steel worktop with 65mm (or 50mm) fascia
Electrical safety climate class	5
Internal lighting	1 x 20W T8 Frosted LED Tube (Ø26 x 900mm, 5500K) - Switched
Electrical	230-240 Volts a.c. 50 Hz, single phase supply, 0.3 Amps
Temperature range	+1°C to +4°C
GEMS class	M1
GEMS energy consumption	4.70 kWh/24h
GEMS annual running cost	\$515 p.a. (@ \$0.30/kWh)
Refrigeration system	Side mounted, remote refrigeration unit
Electronic controller	SKOPE CAREL ir33
Refrigerant	Selected at time of order: R134a, R404A, R507, R22
Pipe connection size	Liquid line: 1/4". Suction line: 3/8"
Remote refrigeration duty	480 Watts
Insulation	42mm polyurethane foam
Drainage	Small drain supplied. Must be connected to permanent drain by installer.

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2003 SKOPE Industries Limited

PSS0160 Rev. 4.2 Mar. 2021



SKOPE INDUSTRIES LIMITED

New Zealand Freephone: 0800 947 5673, Australian Freephone: 1800 121 535

Email: skope@skope.com Website: www.skope.com

