

specifications

CL600r-3SW



Counterline, 3 Door (Swing), Remote Fridge

CABINET DIMENSIONS

| | External | Internal |
|---------------------|--------------------|----------|
| Height: | 725mm* | 545mm |
| Width: | 2065mm | 1730mm |
| Depth: | 680mm** | 565mm |
| Floor area: | 1.40m ² | |
| Gross volume | 600L | |

* Height excludes castors, legs or optional worktop

**Depth with optional worktop is 700mm

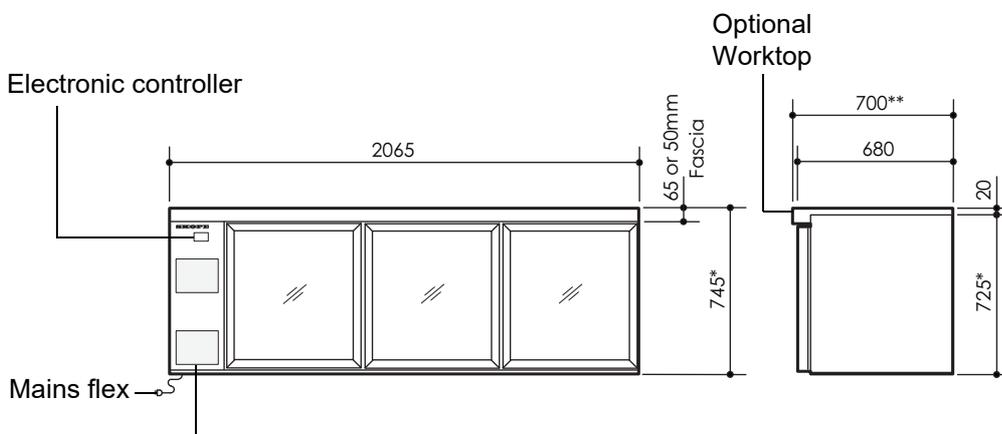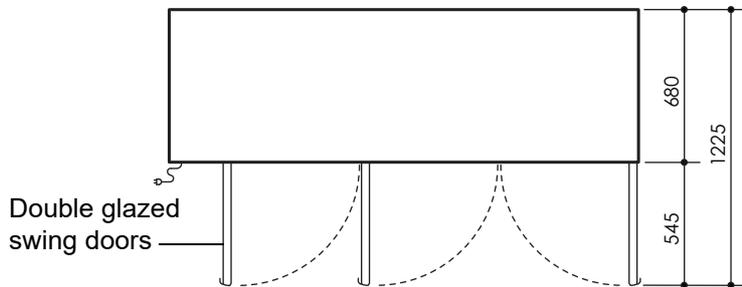

Side mounted remote refrigeration unit

CABINET SPECIFICATIONS

| | |
|--|---|
| Doors | Self-closing, double glazed, toughened Low-E safety glass with aluminium extrusion or insulated solid doors |
| Internal door opening size | 3 door openings: 544mm high x 520mm wide |
| Shelves | Adjustable height, white plastic coated, steel wire shelves - two per door |
| Worktop (optional) | Optional 20mm high stainless steel worktop with 65mm (or 50mm) fascia |
| Electrical safety climate class | 5 |
| Internal lighting | 1 x 24W T8 Frosted LED Tube (Ø26 x 1500mm, 5500K) - Switched |
| Electrical | 230-240 Volts a.c. 50 Hz, single phase supply, 0.7 Amps |
| Temperature range | +1°C to +4°C |
| GEMS class | M1 |
| GEMS energy consumption | 5.37 kWh/24h |
| GEMS annual running cost | \$588 p.a. (@ \$0.30/kWh) |
| Refrigeration system | Side mounted, remote refrigeration unit |
| Electronic controller | SKOPE CAREL ir33 |
| Refrigerant | Selected at time of order: R134a, R404A, R507, R22 |
| Pipe connection size | Liquid line: 1/4". Suction line: 3/8" |
| Remote refrigeration duty | 480 Watts |
| Insulation | 42mm polyurethane foam |
| Drainage | Small drain supplied. Must be connected to permanent drain by installer. |

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2003 SKOPE Industries Limited

PSS0161 Rev. 4.2 Mar. 2021



SKOPE INDUSTRIES LIMITED

New Zealand Freephone: 0800 947 5673, Australian Freephone: 1800 121 535

Email: skope@skope.com Website: www.skope.com

