


specifications

SKB1500-A Series

Bottom Mount ActiveCore
Three Door Upright Chiller

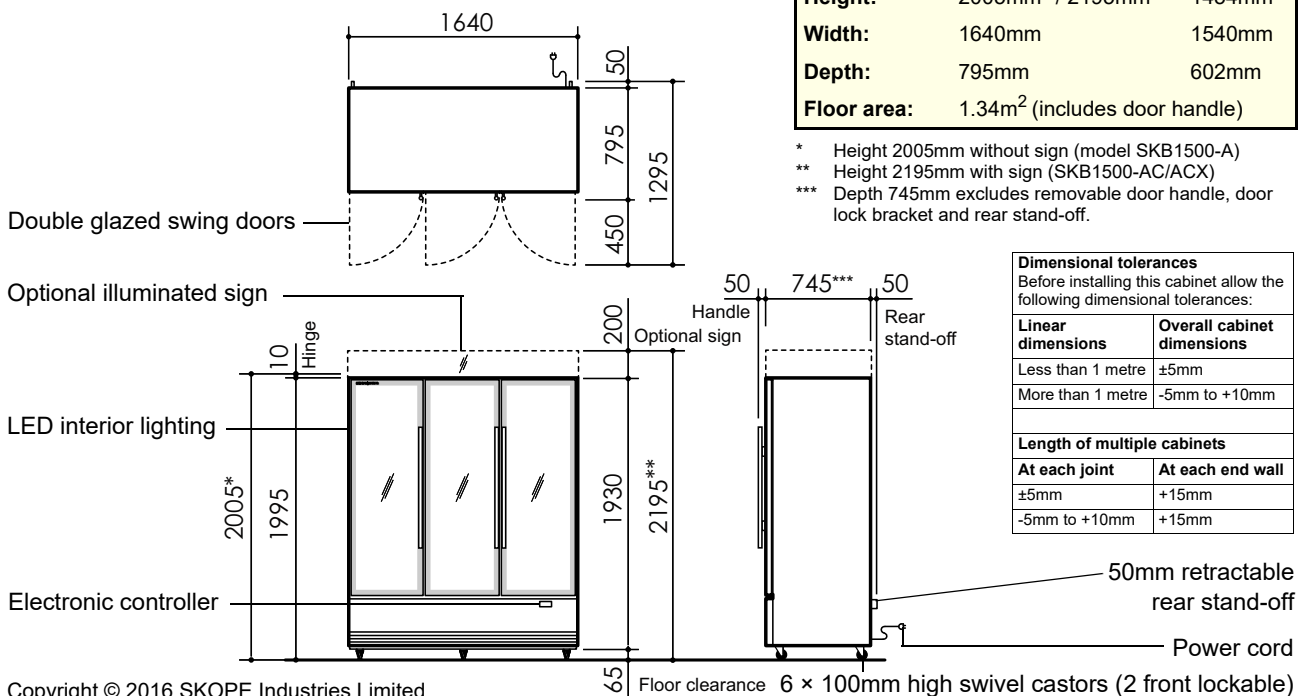

GENERAL SPECIFICATIONS

Temperature range	1°C to 4°C (adjustable up to 15°C)
Climate class	5 (Tested at 43°C)
Doors	Lockable, self-closing, double glazed, single Low-E, argon filled, toughened safety glass swing doors (hinged LH, LH, RH)
Internal Volume	1433 litres
Power supply	220-240 Volts a.c. 50 Hz, single phase supply. Supplied with 10 Amp 3-Pin plug
Current draw	4.8 Amps (includes unit 4.0 Amps)
Refrigeration system	Removable ActiveCore bottom mount refrigeration unit (UBHCCI-0003), no plumbing required
Refrigerant	R134a / 475g
Nominal capacity	1000 Watts
Controller	Carel S4 electronic controller
Drainage	No plumbing required
Weight	330 kg

INDIVIDUAL SPECIFICATIONS

Model	SKB1500-A	SKB1500-AC	SKB1500-ACX
Part number	MB15GY	MB15BY	MB15BX
Sign	n.a.	200mm high illuminated sign	
Sign lighting	n.a.	1 × 22W T8 LED tube (Ø26mm × 1500mm)	
Interior side lights	3 × 20W (1400mm) LED module strip side and pillar lights		n.a.
Interior shelf lights	n.a.	n.a.	15 × 7W LED module strip shelf lights
Shelves	12 × wire and 3 × stainless steel	15 × wire and 3 × stainless steel	15 × wire and 3 × stainless steel
Wire shelves: Adjustable height, 490 wide × 520 deep (side), 540 wide × 520 deep (middle) Stainless steel bottom shelf: Not adjustable, 485 wide × 515 deep (side), 545 wide × 515 deep (middle)			

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0432 Rev. 3.0 Mar. 2018



SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.co.nz, Website: www.skope.com

