

specifications


TME650-A Series

Top Mount ActiveCore
One Door Upright Fridge

Cabinet Dimensions

	External	Internal
Height	2210 mm	1570 mm
Width	740 mm	640 mm
Depth	745 mm	554 mm
Floor area	0.55 m ² (includes door handle)	

* Depth 695 mm excludes removable door handle and door lock bracket.

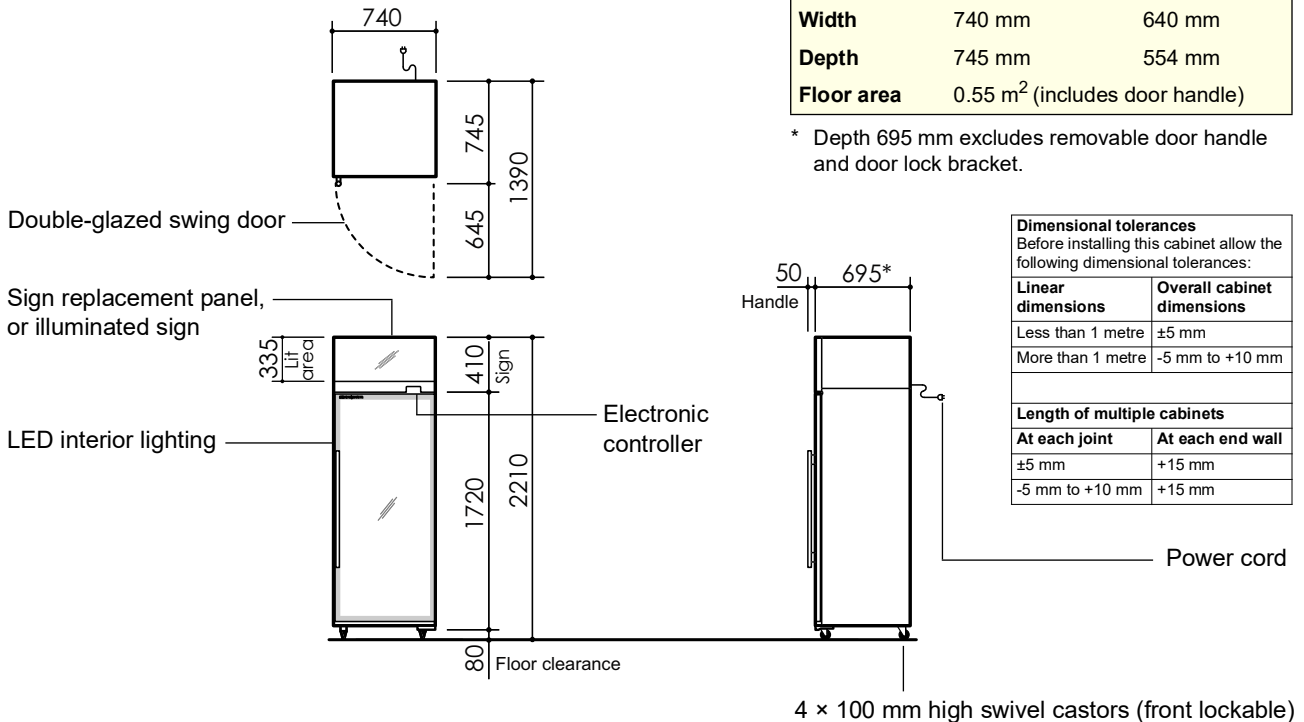

Dimensional tolerances	
Before installing this cabinet allow the following dimensional tolerances:	
Linear dimensions	Overall cabinet dimensions
Less than 1 metre	±5 mm
More than 1 metre	-5 mm to +10 mm
Length of multiple cabinets	
At each joint	At each end wall
±5 mm	+15 mm
-5 mm to +10 mm	+15 mm

Copyright © 2016 SKOPE Industries Limited

General Specifications

Temperature range	1°C to 4°C (adjustable up to 15°C)
Climate class	5 (tested at 43°C)
Door	Lockable, self-closing, reversible, double-glazed, single low-e, argon-filled, toughened safety glass swing door (hinged right hand)
Internal Volume	610 litres
Interior lighting	1 × 22 W T8 LED tube (Ø26 mm × 1500 mm) side light
Shelves	5 adjustable height wire shelves: 625 mm wide × 470 mm deep
Power supply	220-240 volts a.c. 50 Hz, single phase supply. Supplied with 10 amp 3-pin plug
Current draw	3.5 amps (includes unit 2.9 amps)
Refrigeration system	Removable ActiveCore top mount refrigeration unit (UTHCCI-0002)
Refrigerant	R134a/380 g
Nominal capacity	836 watts
Controller	CAREL S4 electronic controller
Drainage	No plumbing required
Weight	170 kg

Individual Specifications

Model	TME650-A	TME650-AC
Part number	SM65GV	SM65BV
Sign	Sign replacement panel	410 mm high illuminated sign
Sign lighting	n.a.	1 × 11 W T8 LED tube (Ø26 mm × 600 mm)

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0470 Rev. 2.2 Aug. 2023

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com