

specifications


VF1300X

Top Mount, 2 Door (Glass), Vertical Freezer

CABINET DIMENSIONS

	External	Internal
Height:	2210mm	1570mm
Width:	1480mm	1380mm
Depth:	745mm	554mm
Floor area:	1.05m ²	
Gross volume	1310L	

* Excludes removable door handle and lock bracket
** Includes freezer unit lid

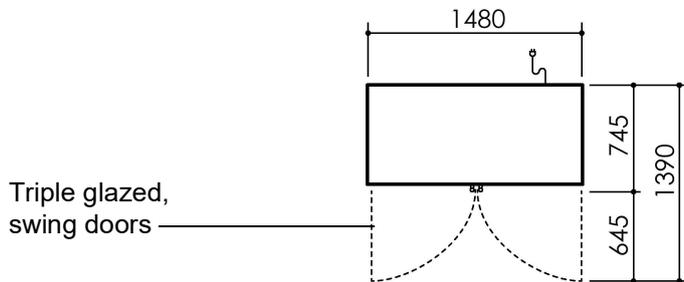

Triple glazed, swing doors

Optional illuminated sign panel (240mm high)

Carel ir33 electronic controller

Optional condenser filter

LED pillar lights


Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions
Less than 1 metre	±5mm
More than 1 metre	-5mm to +10mm

Length of multiple cabinets

At each joint	At each end wall
±5mm	+15mm
-5mm to +10mm	+15mm

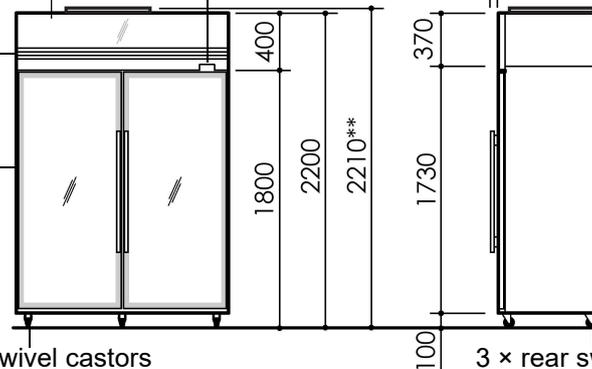

3 × lockable front swivel castors

3 × rear swivel castors

Power cord

GENERAL SPECIFICATIONS

Doors	2 × self-closing, triple glazed, heated, argon filled, toughened safety glass swing door (hinged LH, RH)
Weight	347 kg
Shelves	10 × adjustable height wire shelves: 677mm wide × 460mm deep
Sign	Replacement sign panel. Optional lit sign available with 1 × 20 Watt 1200mm T8 LED tube
Electrical safety climate class	5
Internal lighting	2 × 20 Watt 1400mm LED strip pillar lights
Power supply	220-240 Volts a.c. 50 Hz, single phase supply. Supplied with 10 Amp 3-Pin plug
Current draw	9.0 Amps.
Temperature range	-18°C to -21°C
GEMS class	L1
GEMS energy consumption	29.82 kWh/24h
GEMS annual running cost	\$3,267 p.a. (@ \$0.30/kWh)
Refrigeration system	Top mounted SKOPE Cyclone freezer unit with electronic controller (UF50ACD) (7.8 Amps)
Refrigerant	R452A / 1000g
Nominal capacity	1097 Watts @ -30°C evaporator, 50°C condenser
Electronic controller	CAREL ir33 electronic controller
Drainage	No plumbing required

