


# specifications

## RF8.PPZ.4.SD

### ReFlex Series, 4 Solid Door Large Pizza Preparation Fridge with Sliding Lid

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

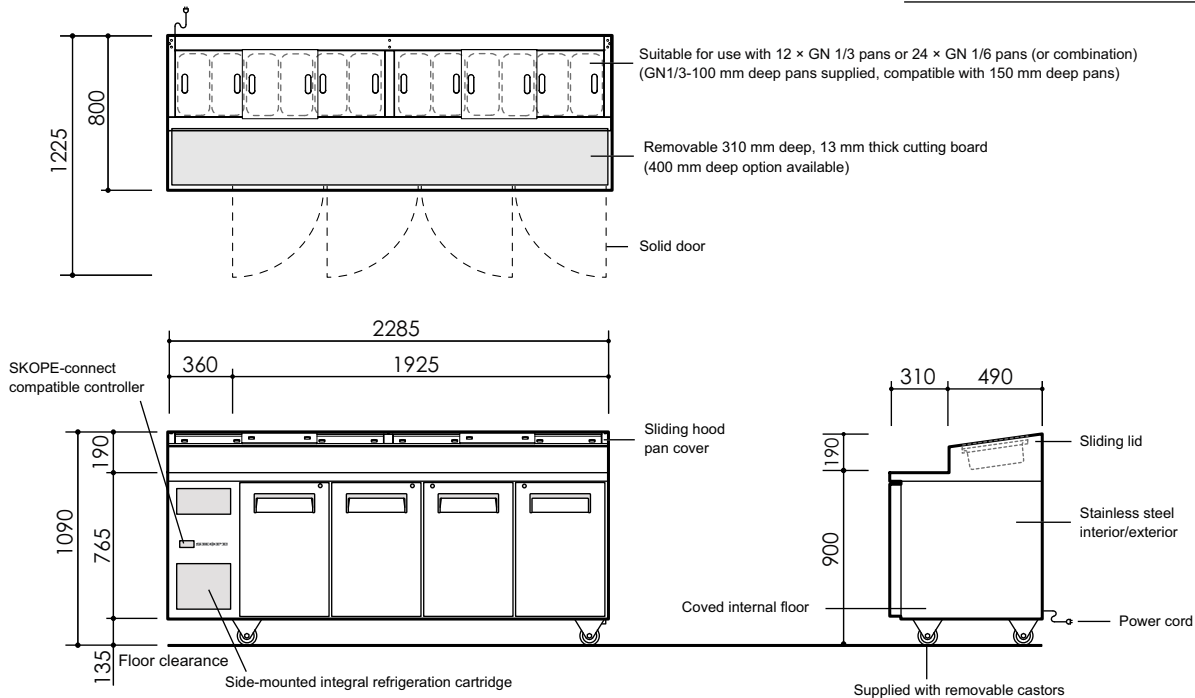

#### CABINET

Doors	4 x self-closing, lockable, solid swing doors with stay-open position at over 90°, hinged LH, LH, RH, RH
Internal door opening	4 x door openings: 590 mm high x 370 mm wide
Shelves	8 x adjustable height shelves. Middle shelves: 475 mm wide x 610 mm deep. Outer shelves: 415 mm wide x 610 mm deep. Each shelf is held in place with 4 x shelf clips. Additional shelf clips are available on request.
Worktop	Removable, food grade, 13 mm plastic cutting board
Material	304 AISI stainless steel interior and exterior

#### PERFORMANCE

Maximum ambient temperature	40°C (lid(s) closed), or 30°C (lid(s) open)
Temperature range	1°C to 5°C (adjustable with SKOPE-connect™ 0°C to 15°C)
Total energy consumption	5.84 kWh/24 h (@ 30°C/55% relative humidity)
Annual running cost	\$639 p.a. (@ \$0.30/kWh)

#### ELECTRICAL

Electrical safety climate class	5 (40°C/40% relative humidity)
Interior lighting	3 x 400 mm, 4W LED lights (door activated)
Power cord	Supplied with a 10 amp plug and 2 m lead
Power supply	220-240 volts a.c. 50 Hz, single phase supply
Current draw	3.5 amps (includes unit 2.2 amps)

#### REFRIGERATION

Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth® wireless technology
Refrigeration system	Side-mounted, integral, removable refrigeration cartridge (part number ULQCN-0030)
Refrigerant	R290/90 g (natural refrigerant)
Nominal capacity	900 watts
Heat rejection (average/peak)	250 watts/300 watts
Drainage	No plumbing required in standard applications. If lids are left open for more than 4 hours per day, or venues have high or fluctuating ambient temperatures and humidity, SKOPE recommends connecting condensate to an in-floor drain.

#### DIMENSIONS

	External	Internal
Height	1140 mm	605 mm
Width	2285 mm	1835 mm
Depth	800 mm	640 mm
Floor area	1.83 m <sup>2</sup>	
Weight	233 kg	
Gross volume	710 L	

#### Height variation

Supplied castors	1140 mm
Height adjustable legs	1150 to 1200 mm
No castors	1005 mm

#### Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5 mm	
More than 1 metre	-5 mm to +10 mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

#### Ventilation requirements

Top	Not required
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2020 SKOPE Industries Limited

PSS1163 | Rev. 1.0 Apr. 2024

#### SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673  
Email: skope@skope.com, Website: www.skope.com

