


## Cabinet Dimensions:

	External	Internal
<b>Width (mm):</b>	1290	815
<b>Depth (mm):</b>	700	580
<b>Height (mm):</b>	845 to 885 (standard legs) 850 (castors) 720 (plinth mount)	475
<b>Weight (kg):</b>	113	
<b>Capacity (L):</b>	225	
<b>Footprint (m<sup>2</sup>):</b>	0.9	
<b>Electrical Voltage (V):</b>	220-240	
<b>Electrical Ampere (A):</b>	1.8	
<b>Electrical Frequency (Hz):</b>	50	
<b>MEPS TEC:</b>	3.5	
<b>Refrigerant:</b>	R290 / 90g	

### Dimensional Tolerances

+ Allow for dimensional tolerance when installing the cabinet(s).

Linear Dimensions	Single Cabinet Dimensions
Less than 1 metre	+5mm
More than 1 metre	-5mm to +10mm
Length of Multiple Cabinets	
At each joint	At each end wall
+5mm	+15mm
-5mm to +10mm	+15mm

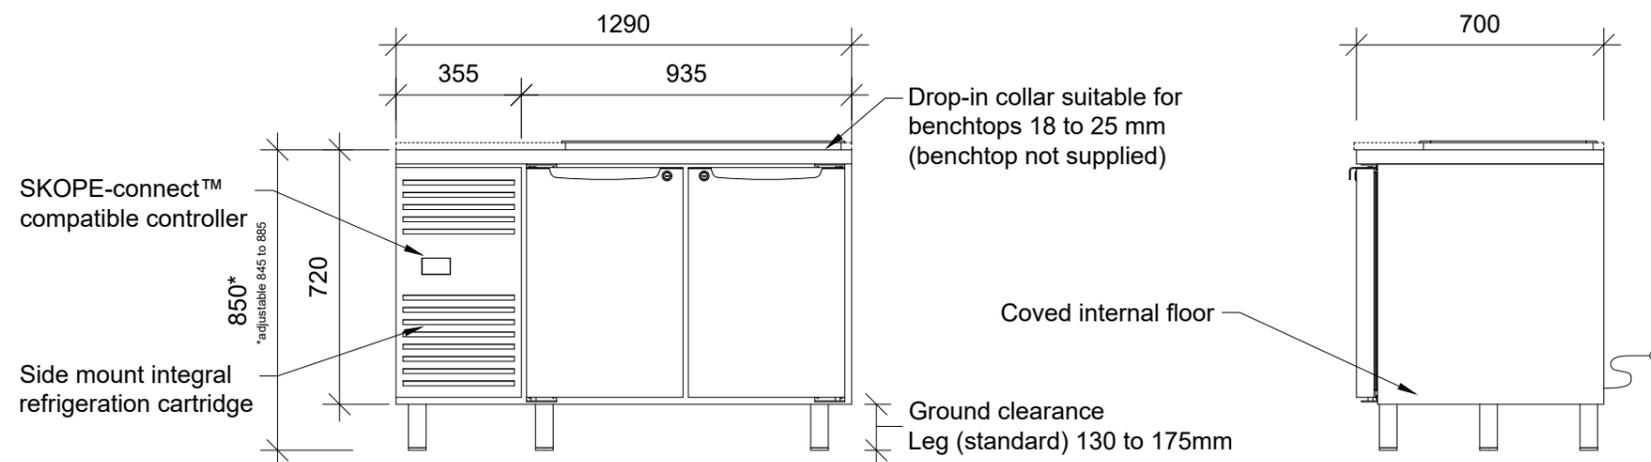

# SKOPE®

## Industries Limited

66 Princess St. PO Box 1091  
 Christchurch, New Zealand  
 New Zealand Freephone: 0900 947 5673  
 Australian Freephone: 1800 121 535  
 Email: enquiry@skopeco.nz  
 Website: www.skopeco.nz

### Model:

PG13.PPS.DC.2.SD

### Description:

Two Solid Door Salad Preparation GN1/3 Drop-in Collar Fridge

### Unless Otherwise Specified:

Folded Dimension: Overall  
 Linear Tolerances: ± 0.5mm  
 Angular Tolerances: ± 0.5mm  
 Units: Millimeters

### Scale:

1 : 20

### Revision:

Copyright © SKOPE Industries Limited