

Four Drawer, Two Bay, ChefBase GN2/1 Fridge

Range: ProSpec

SKOPE ID: P2CR2-L3

Dimensions: 1840 mm (W) × 815 mm (D) × 610 mm (H)

Gross Volume: 373 L

Project: _____

Item #: _____



A ChefBase four drawer underbench fridge designed for busy kitchens at venues such as restaurants, clubs, pubs, and cafés. The fridge is engineered to safely store food in ambient environments of up to 40°C (climate class 5). With GEMS-certified 5M1 performance, standard storage temperatures range from 1°C to 4°C, or are adjustable via the SKOPE-connect smartphone app for specific food types from -2°C to 15°C. The fridge is made from food-safe 304 AISI stainless steel throughout the interior and exterior. The 610 mm high and 815 mm deep cabinet has a worktop suitable for placing a grill or other similar kitchen equipment, and comes complete with a marine edge. The fridge can be positioned on the supplied castors, on a pre-installed plinth by removing the castors, or fitted with optional legs for a finished working height of 705 mm. The four GN-compatible soft-closing drawers are fitted with ergonomic 3 mm gauge stainless steel handles and built-in barrel locks. The fridge has a split refrigeration system with side-mounted condensing unit, and uses R290 natural refrigerant for low energy consumption, low heat discharge and low noise output. A controller that connects to the free SKOPE-connect app to enable you to set temperatures and alerts, monitor temperatures and energy, and more comes included. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



Natural Refrigerant



GEMS




304 Stainless Steel





GN-compatible



SKOPE-connect

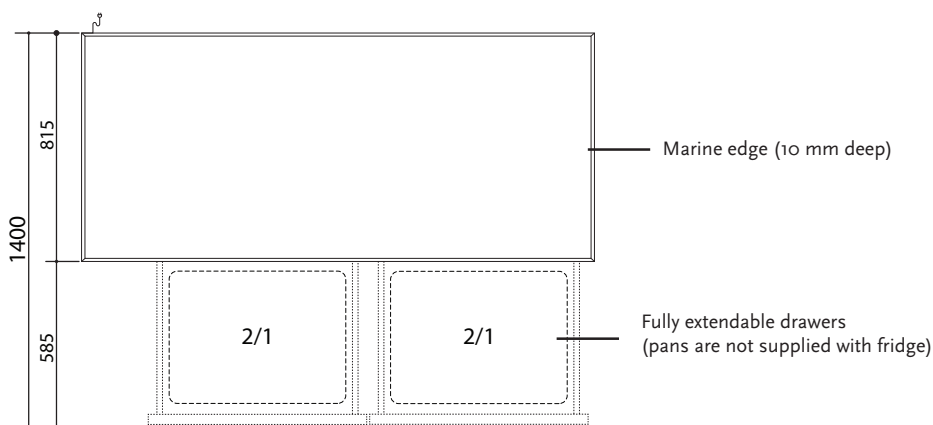

SKOPE-connect™
compatible controller

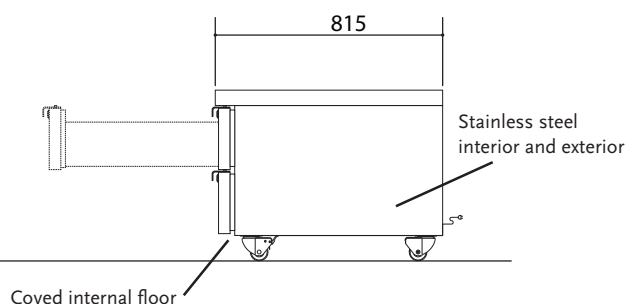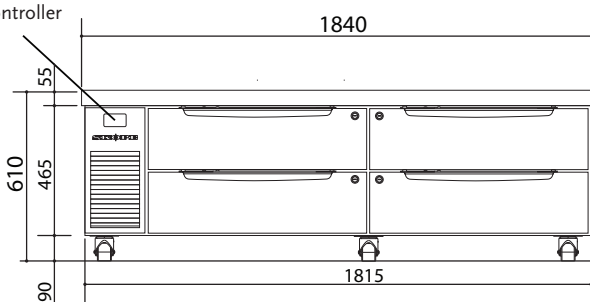

Cabinet

Type	ChefBase				
Finish	304 AISI stainless steel				
Insulation	Type	PU foam			
	Thickness (mm)	50			
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)			
Drawers	Lock	Barrel lock			
	Width (mm)	625	Depth (mm)	505	Height (mm)
Gastronorm	Size	2/1			
Lighting*	None				

Dimensions†

	External	Internal	Packed
Width (mm)	1840	1510	1895
Depth (mm)	815	650	880
Height (mm)	610 (standard castors)		
	665 to 705 (legs)	380	690
	520 (plinth mount)		
Weight (kg)	160		175
Gross Volume (L)	373		
Footprint (m²)	1.5		

Ventilation (mm)

Top	Sides	Rear
Not required	100 mm left side only	Not required

Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets
		At each joint
		At each end wall
Less than 1 metre	±5 mm	±5 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm

Performance

Product Temperature Range (°C)	0 to 15	
Maximum Ambient Temperature (°C)	40	
Sound Level (dB(A))	Standard	TBC
	Hush Mode*	TBC

Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	3	
Product Temperature Class	5M1 (-1 to 5°C)	
Total Energy Consumption	5.00 kWh/24 h	
Annual Running Costs	\$548 (@ \$0.30/kWh)	

Electrical

Supply	220 to 240 volts a.c., 50 Hz, single phase supply	
Cord	2 m power cord with 3-pin, 10 amp plug	
Current Draw (A)	1.8	

Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)		
System Type	Split system		
Cartridge Weight (kg)	n.a.		
Refrigerant/Charge	R290/100 g		
Nominal Capacity (W)	550 (EN12900 MBP)		
Heat Rejection (W)	Average	210	Peak 215
Defrost Type	Automatic, off-cycle		
Drainage	No plumbing required		

* Accessible via the free SKOPE-connect™ app.



PG21.CBR.2.D4
on the SKOPE website