


specifications

RF8.CBR.2.D4

ReFlex Series, 4 Drawer, Chef Base Fridge

Project: _____

Item No: _____

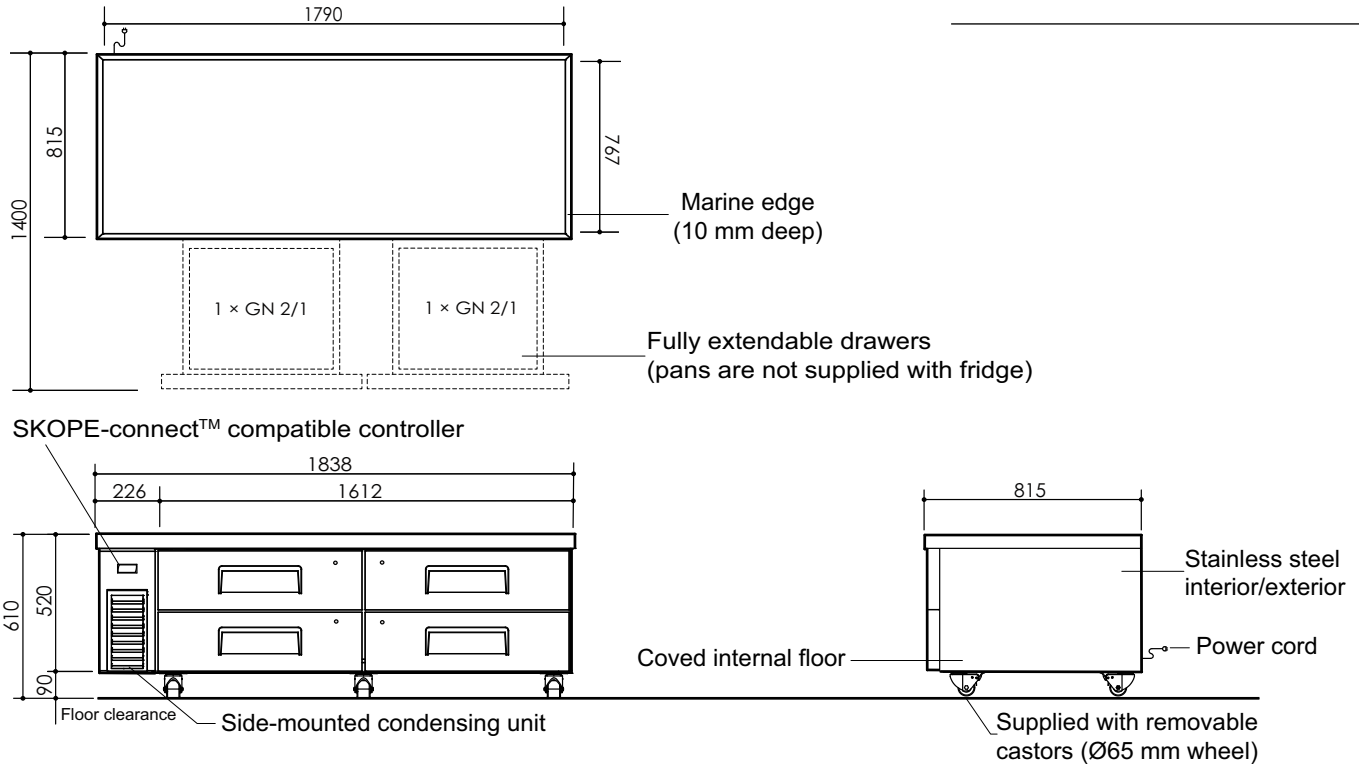

CABINET

| | |
|----------|---|
| Drawers | 4 × fully extendible, refrigerated, stainless steel drawers with individual key locks. 2 bank of full drawers including stainless steel sheet base and sides. Each drawer fits 1 × GN 2/1, 100 mm deep pan (not supplied with fridge). |
| Shelves | n.a. |
| Worktop | Total thickness 45 mm (0.7 mm 304 AISI stainless steel over heat shield and insulating cyclopentane foamed core) |
| Material | 304 AISI stainless steel interior and exterior |

PERFORMANCE

| | |
|-----------------------------|--|
| Maximum ambient temperature | 40°C |
| Temperature range | 1°C to 4°C (adjustable with SKOPE-connect 0°C to 15°C) |
| GEMS class | 5M1 |
| GEMS energy consumption | 4.40 kWh/24 h |
| GEMS annual running cost | \$482 p.a. (@ \$0.30/kWh) |

ELECTRICAL

| | |
|---------------------------------|---|
| Electrical safety climate class | 5 |
| Interior lighting | n.a. |
| Power cord | Supplied with a 10 amp plug and 2 m lead |
| Power supply | 220-240 volts a.c. 50 Hz, single phase supply |
| Current draw | 1.8 amps |

REFRIGERATION

| | |
|-------------------------------|---|
| Controller | SCS Connect (SKOPE-connect™ compatible) |
| Connectivity interface | Bluetooth® wireless technology |
| Refrigeration system | Built-in, integral refrigeration system with side-mounted condensing unit |
| Refrigerant | R290/100 g (natural refrigerant) |
| Nominal capacity | 650 watts |
| Heat rejection (average/peak) | 185 watts/190 watts |
| Drainage | No plumbing required |

DIMENSIONS

| | External | Internal |
|--------------|---------------------|----------|
| Height | 600 mm* | 379 mm |
| Width | 1838 mm | 1510 mm |
| Depth | 815 mm | 649 mm |
| Floor area | 1.50 m ² | |
| Weight | 160 kg | |
| Gross volume | 371 L | |
| Net volume | 118 L | |

* With supplied castors fitted and excluding marine edge. See height variation below.

| Height variation | |
|--|--------|
| Supplied castors | 610 mm |
| Supplied castors and excluding marine edge | 600 mm |
| No castors | 520 mm |

| Dimensional tolerances | | |
|--|-----------------------------|------------------|
| Before installing this cabinet allow the following dimensional tolerances: | | |
| Linear dimensions | Overall cabinet dimensions | |
| Less than 1 metre | ±5 mm | |
| More than 1 metre | -5 mm to +10 mm | |
| | Length of multiple cabinets | |
| | At each joint | At each end wall |
| Less than 1 metre | ±5 mm | +15 mm |
| More than 1 metre | -5 mm to +10 mm | +15 mm |

| Ventilation requirements | |
|--------------------------|---------------------------|
| Top | Not required |
| Sides | 100 mm for left side only |
| Back | Not required |
| Bottom | Not required |

SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673
Email: skope@skope.com, Website: www.skope.com