

specifications

RF7.UPF.1.SD

ReFlex Series, 1 Solid Door, Upright Freezer



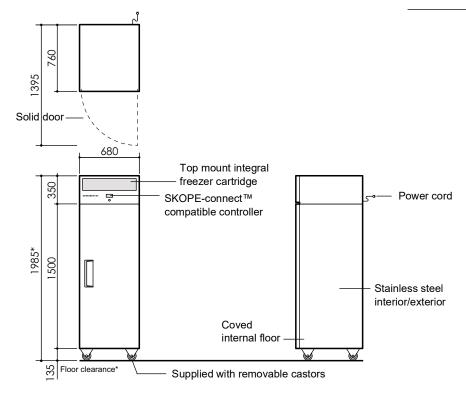

CABINET

Doors 1 × self-closing, lockable, reversible, solid swing door. Supplied RH

Internal door opening 1 × door openings: 1375 mm high × 555 mm wide

Shelves 5 × adjustable height shelves: 540 mm wide × 530 mm deep

Worktop

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 40°C

Temperature range -21°C to -18°C (adjustable with SKOPE-connect -26°C to -12°C)

GEMS class

GEMS energy consumption 7.40 kWh/24 h

GEMS annual running cost \$811 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class | 5

Interior lighting 1 × 1200 mm, 12W LED light (door activated) Power cord Supplied with a 10 amp plug and 2 m lead Power supply 220-240 volts a.c. 50 Hz, single phase supply

Current draw 4.0 amps (includes unit 3.9 amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connect[™] compatible)

Connectivity interface Bluetooth wireless technology

Refrigeration system Top mounted, integral, removable freezer cartridge (part number

UTKDNI-0019)

R290/94 g (natural refrigerant) Refrigerant

Nominal capacity 550 watts

Heat rejection (avg/peak) 310 watts/430 watts Drainage No plumbing required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

DIMENSIONS			
	External	Internal	
Height	1985 mm*	1395 mm	
Width	680 mm	560 mm	
Depth	760 mm	600 mm	
Floor area	0.52 m ²		
Weight	122 kg		
Gross volume	469 L		

³⁶³ L Net volume With supplied castors fitted. See height variation below

Height variation			
Supplied castors	1985 mm		
Height adjustable legs	1995 to 2035 mm		
No castors or legs	1850 mm		

Dimensional tolerances			
Before installing this cabinet allow the following dimensional tolerances:			
Linear dimensions	Overall cabinet dimensions		
Less than 1 metre	±5 mm		
More than 1 metre	-5 mm to +10 mm Length of multiple cabinets		
	At each joint	At each end wall	
Less than 1 metre	±5 mm	+15 mm	
More than 1 metre	-5 mm to +10 mm	+15 mm	

Ventilation requi	Ventilation requirements	
Тор	300 mm	
Sides	Not required	
Back	Not required	
Bottom	Not required	

