


specifications

BME1500N-A Series

ActiveCore Series, 3 Door (Glass), Upright Fridge

Project: _____

Item No: _____

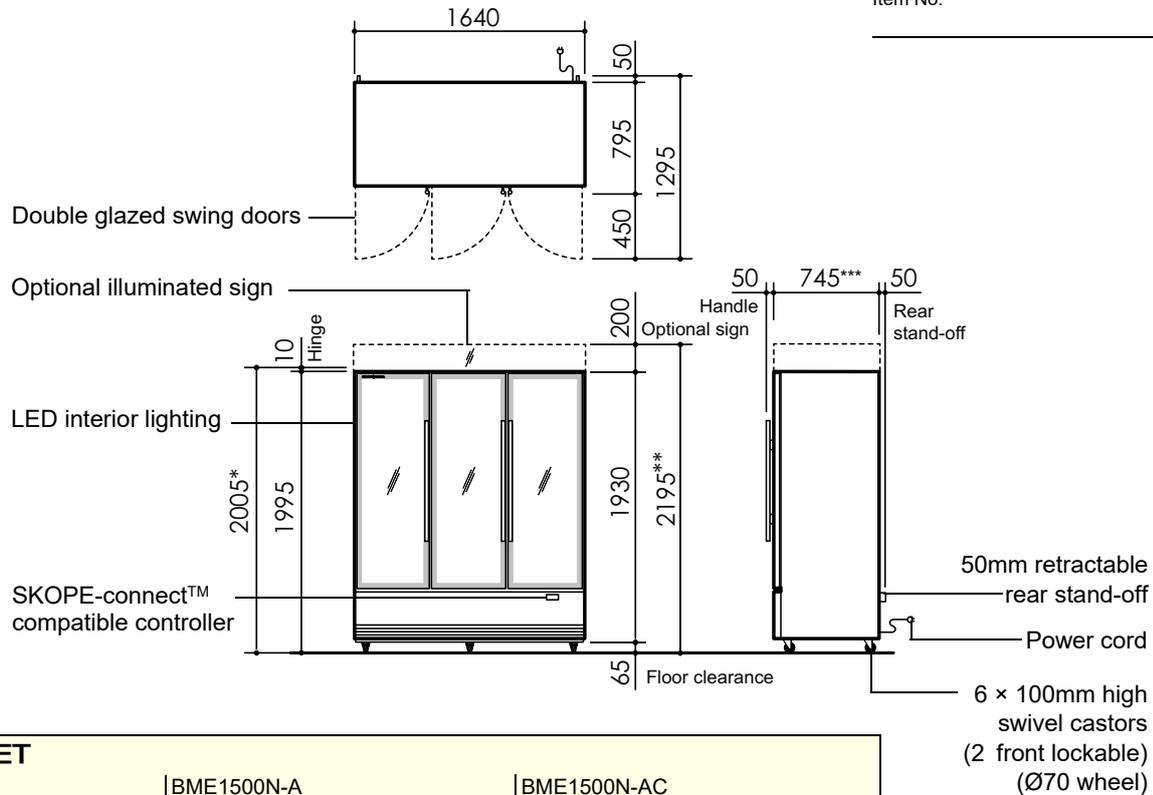

| CABINET | |
|-----------------------|--|
| Model ID | BME1500N-A BME1500N-AC |
| Doors | 3 × self-closing, double glazed, single Low-E, argon filled, lockable, argon filled, toughened safety glass swing doors (hinged LH, LH, RH) |
| Internal door opening | 3 × door openings: 1454mm high × 430mm wide |
| Shelves | 12 × wire and 3 × stainless steel 15 × wire and 3 × stainless steel Wire shelves: Adjustable height, 490 wide × 520 deep (5 each side), 540 wide × 520 deep (5 middle) Stainless steel bottom shelf: Not adjustable, 485 wide × 515 deep (1 each side), 545 wide × 515 deep (1 middle) |
| Sign | n.a. Illuminated sign |
| Material | Powdercoat galvanised steel |

| PERFORMANCE | |
|--------------------------|--|
| Max. ambient temp. | 40°C |
| Temperature range | 1°C to 4°C (adjustable via SKOPE-connect™ 1°C to 15°C) |
| GEMS class | M1 M1 |
| GEMS energy consumption | 4.99 kWh/24h 5.26 kWh/24h |
| GEMS annual running cost | \$547 p.a. (@ \$0.30/kWh) \$576 p.a. (@ \$0.30/kWh) |

| ELECTRICAL | |
|---------------------------------|---|
| Electrical safety climate class | 5 |
| Interior side lighting | 3 × 1370mm, 15W LED 3 × 1370mm, 15W LED |
| Sign lighting | n.a. 1 × 1590mm, 18W LED |
| Power cord | Supplied with 2.0m, 10 Amp plug and lead |
| Power supply | 220-240 Volts a.c. 50 Hz, single phase supply |
| Current draw | 3.4 Amps (includes unit 2.6 Amps) |

| REFRIGERATION | |
|---------------------------|---|
| Controller | SCS Connect (SKOPE-connect™ compatible) |
| Connectivity interface | Bluetooth |
| Refrigeration system | Bottom mounted, integral, removable ActiveCore refrigeration unit (UBHCNI-0008) |
| Refrigerant | R290 / 99g (natural refrigerant) |
| Nominal capacity | 740 Watts |
| Heat rejection (Avg/peak) | 220 Watts/275 Watts |
| Drainage | No plumbing required |

| DIMENSIONS | | |
|--------------|-----------------------------------|--------------------|
| Height | External 2005mm* / 2195mm** | Internal 1455mm |
| Width | 1640mm | 1540mm |
| Depth | 795mm | 602mm |
| Floor area | 1.34m ² | |
| Weight | 330kg | |
| Gross volume | 1433 L | |

* Height 2005mm without sign (BME1500-A)
** Height 2195mm with sign (BME1500-AC)
*** Depth 745mm excludes removable door handle, door lock bracket and rear stand-off

| Dimensional tolerances | | |
|--|----------------------------|------------------|
| Before installing this cabinet allow the following dimensional tolerances: | | |
| Linear dimensions | Overall cabinet dimensions | |
| Less than 1 metre | ±5mm | |
| More than 1 metre | -5mm to +10mm | |
| Length of multiple cabinets | | |
| | At each joint | At each end wall |
| Less than 1 metre | ±5mm | +15mm |
| More than 1 metre | -5mm to +10mm | +15mm |

| Ventilation requirements | |
|--------------------------|--------------|
| Top | 50mm |
| Sides | Not required |
| Back | 50mm |
| Bottom | 50mm |