

Cabinet Dimensions:

	External	Internal
Width (mm):	1280	1180
Depth (mm):	795	600
Height (mm):	2205 (std. castors)	1455


Weight (kg):	219.4
Capacity (L):	1030
Footprint (m²):	1.02

Electrical Voltage (V):	220-240
Electrical Ampere (A):	3
Electrical Frequency (Hz):	50

MEPS TEC:	4.23 kWh/24h
Refrigerant:	R290 / 84g

Dimensional Tolerances
Before installing this cabinet allow for the following dimensional tolerances:


Linear Dimensions	Single Cabinet Dimensions
Less than 1 metre	+5mm
More than 1 metre	-5mm to +10mm
Length of Multiple Cabinets	
At each joint	At each end wall
+5mm	+15mm
-5mm to +10mm	+15mm



Industries Limited


66 Princess St. PO Box 1091
Christchurch, New Zealand
New Zealand Freephone: 0900 947 5673
Australian Freephone: 1800 121 535
Email: enquiry@skope.co.nz
Website: www.skope.co.nz

Model: BCE1200N		
Description: Vertical, 2 door General Purpose, entry level GDM Fridge with Integral, Bottom refrigeration services		
Unless Otherwise Specified: Folded Dimension: Overall Linear Tolerances: ± 0.5mm Angular Tolerances: ± 0.5mm Units: Millimeters		Scale: 1 : 20
Copyright © SKOPE Industries Limited		Revision:

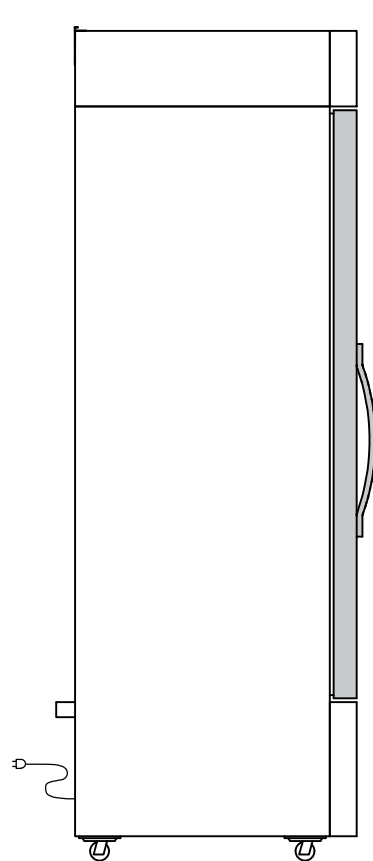


155
Lit area

LED door frame light

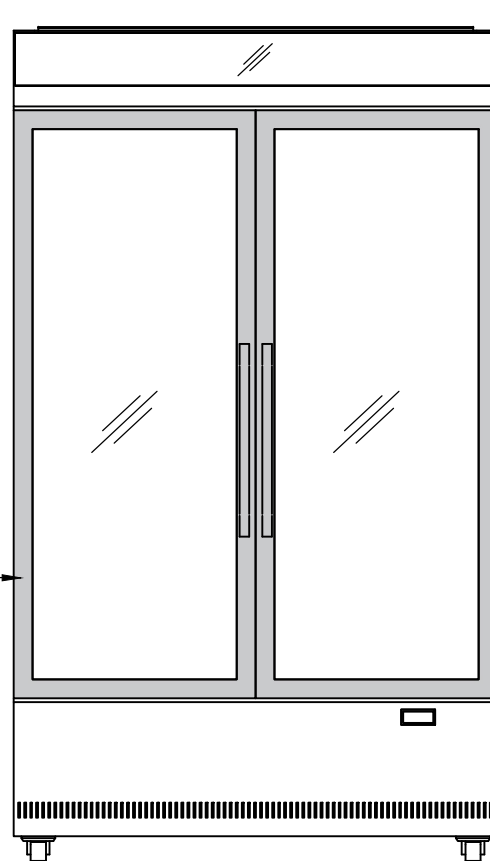

65 Floor clearance

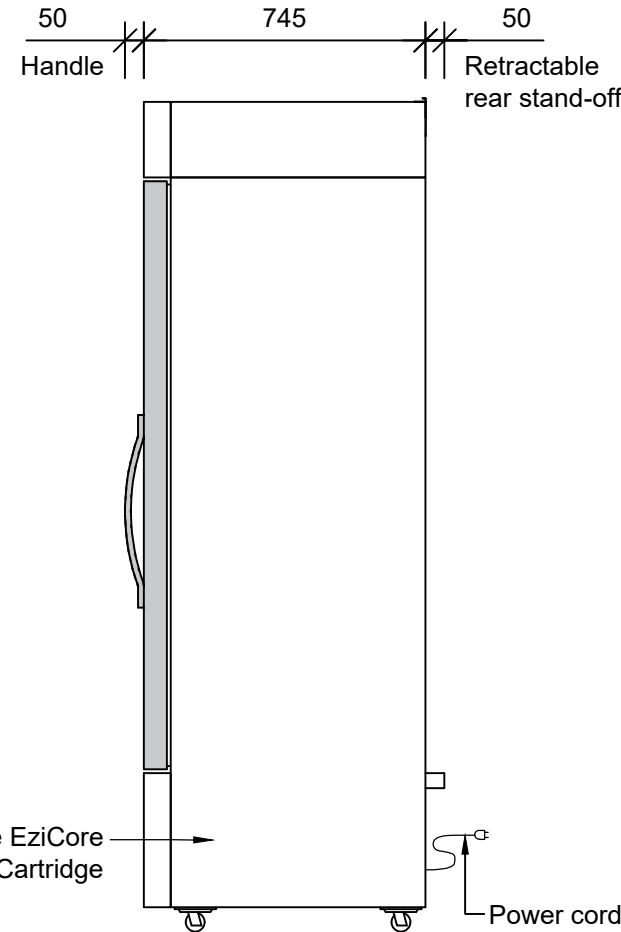

Removable EziCore
Cartridge

Power cord