


# specifications

## SKB1500NS-A Series

ActiveCore Series, 3 Door (Solid), Upright Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

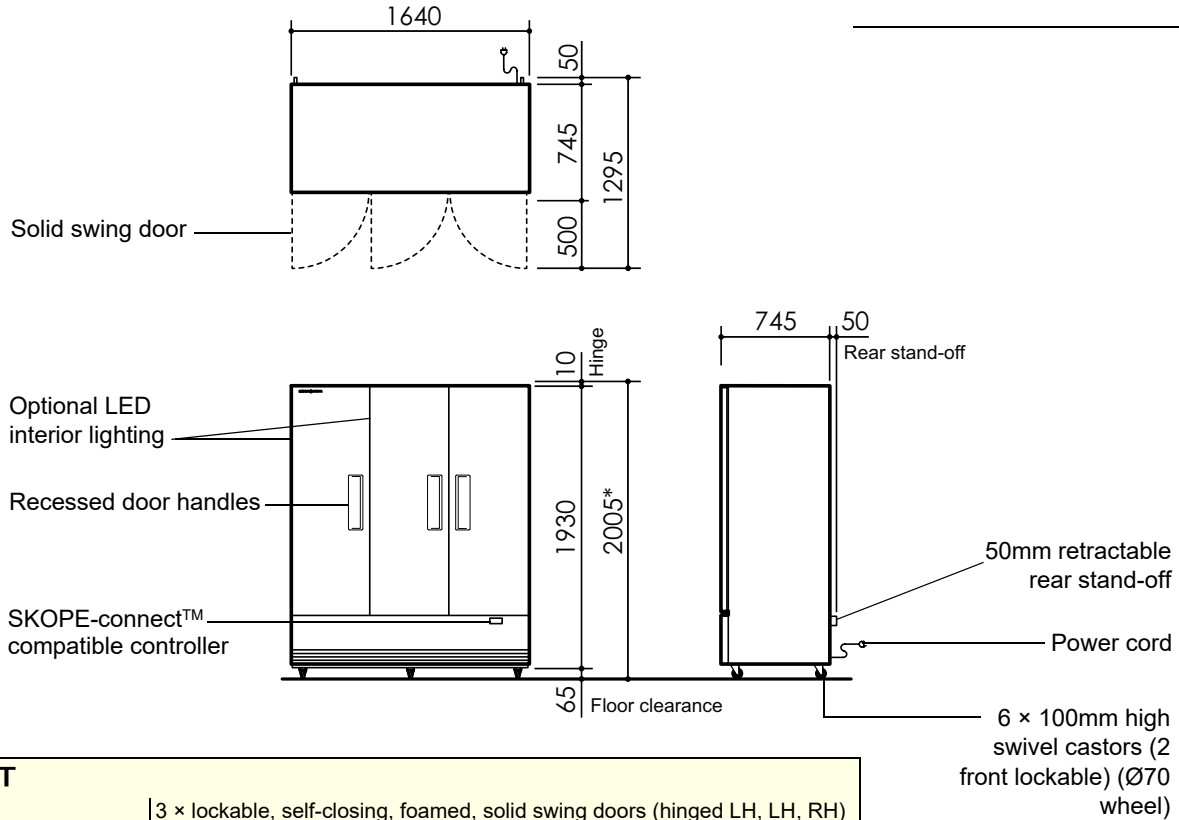

CABINET	
Doors	3 × lockable, self-closing, foamed, solid swing doors (hinged LH, LH, RH)
Internal door opening	3 × door openings: 1454mm high × 525mm wide
Shelves	12 × wire and 3 × stainless steel Wire shelves: Adjustable height, 490mm wide x 520mm deep (4 each side) and 540mm wide x 520mm deep (4 middle) Stainless steel bottom shelves: Not adjustable, 485mm wide x 515mm deep (each side) and 545mm wide x 515mm deep (middle)
Sign	n.a.
Material	Powdercoat galvanized steel or stainless steel interior & exterior
PERFORMANCE	
Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)
GEMS class	5M1
GEMS energy consumption	4.30 kWh/24h
GEMS annual running cost	471 p.a. (@ \$0.30/kWh)
ELECTRICAL	
Electrical safety climate class	5
Interior side lighting	No interior lights or with interior lights: 3 × 1370mm, 15W LED
Interior shelf lighting	n.a.
Sign lighting	n.a.
Power cord	Supplied with 2.0m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	3.4 Amps (includes unit 2.6 Amps)
REFRIGERATION	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth
Refrigeration system	Bottom mounted, integral, removable ActiveCore refrigeration unit (UBHCNI-0008)
Refrigerant	R290 / 99g (natural refrigerant)
Nominal capacity	740 Watts
Heat rejection (Avg/peak)	180 Watts/210 Watts
Drainage	No plumbing required

DIMENSIONS		
	External	Internal
Height	2005mm*	1454mm
Width	1640mm	1540mm
Depth	745mm	602mm
Floor area	1.30m <sup>2</sup>	
Weight	330kg	
Volume	1433L	
Net volume	1033L	

\*Height 2005mm includes top door hinges

Dimensional tolerances		
Before installing this cabinet allow the following dimensional tolerances:		
Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

Ventilation requirements	
Top	50mm
Sides	Not required
Back	50mm
Bottom	50mm