


# specifications

## SKB900NS-A Series

ActiveCore Series, 2 Door (Solid), Upright Fridge

Project: \_\_\_\_\_

Item No: \_\_\_\_\_

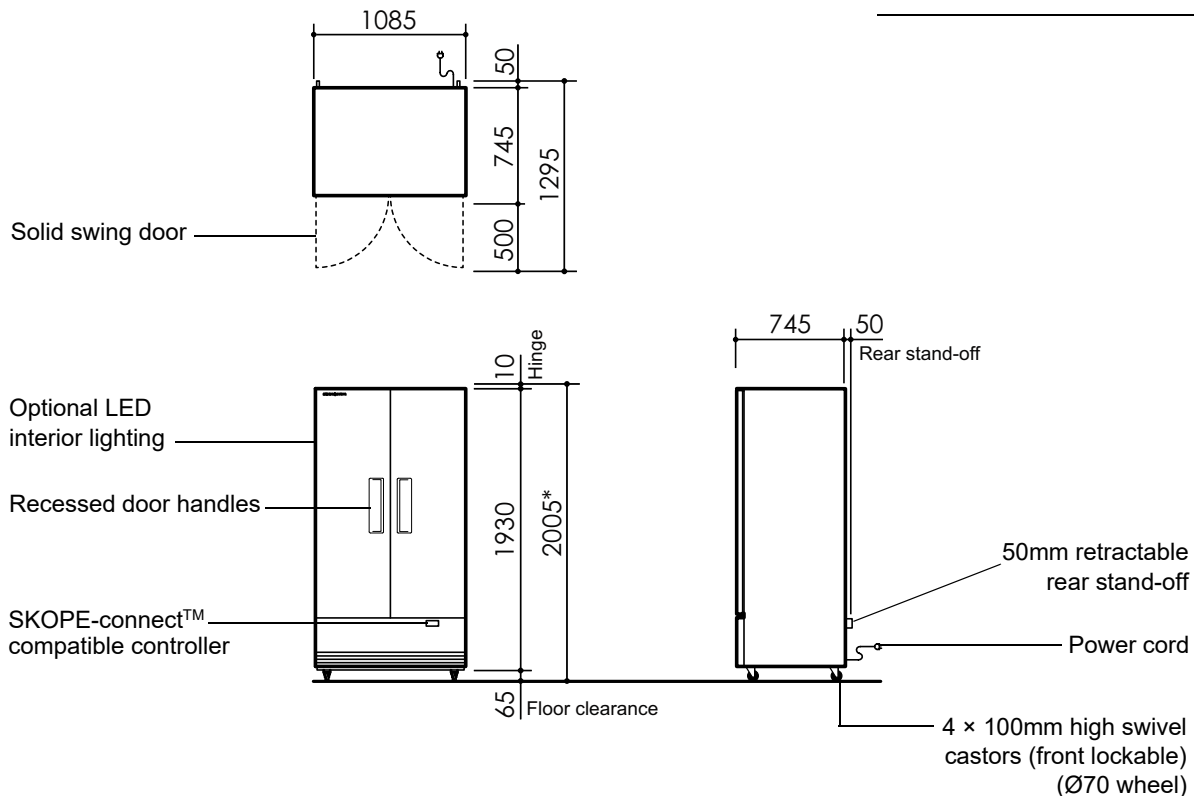

<b>CABINET</b>	
Doors	2 x lockable, self-closing, foamed, solid swing doors (hinged LH, RH)
Internal door opening	2 x door openings: 1454mm high x TBCmm wide
Shelves	8 x wire and 2 x stainless steel Wire shelves: Adjustable height, 480mm wide x 520mm deep Stainless steel bottom shelf: Not adjustable, 485mm wide x 515mm deep
Sign	n.a.
Material	Powdercoat galvanized steel or stainless steel interior & exterior
<b>PERFORMANCE</b>	
Max. ambient temp.	40°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)
GEMS class	5M1
GEMS energy consumption	2.76 kWh/24h
GEMS annual running cost	302 p.a. (@ \$0.30/kWh)
<b>ELECTRICAL</b>	
Electrical safety climate class	5
Interior side lighting	No interior lights or with interior lights: 2 x 1370mm, 15W LED
Interior shelf lighting	n.a.
Sign lighting	n.a.
Power cord	Supplied with 2.0m, 10 Amp plug and lead
Power supply	220-240 Volts a.c. 50 Hz, single phase supply
Current draw	3.0 Amps (includes unit 2.6 Amps)
<b>REFRIGERATION</b>	
Controller	SCS Connect (SKOPE-connect™ compatible)
Connectivity interface	Bluetooth
Refrigeration system	Bottom mounted, integral, removable ActiveCore refrigeration unit (UBHCNI-0008)
Refrigerant	R290 / 99g (natural refrigerant)
Nominal capacity	740 Watts
Heat rejection (Avg/peak)	115 Watts/140 Watts
Drainage	No plumbing required

<b>DIMENSIONS</b>		
Height	External 2005mm*	Internal 1454mm
Width	1085mm	985mm
Depth	795mm	602mm
Floor area	0.86m <sup>2</sup>	
Weight	220kg	
Gross volume	880L	
Net volume	646L	

\*Height 2005mm includes top door hinges

<b>Dimensional tolerances</b>		
Before installing this cabinet allow the following dimensional tolerances:		
<b>Linear dimensions</b>	<b>Overall cabinet dimensions</b>	
Less than 1 metre	±5mm	
More than 1 metre	-5mm to +10mm	
	<b>Length of multiple cabinets</b>	
	<b>At each joint</b>	<b>At each end wall</b>
Less than 1 metre	±5mm	+15mm
More than 1 metre	-5mm to +10mm	+15mm

<b>Ventilation requirements</b>	
Top	50mm
Sides	Not required
Back	50mm
Bottom	50mm

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

**SKOPE INDUSTRIES LIMITED**

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

POSS0579 Rev. 2.1 Mar. 2021

