

specifications


SKT1000NT-A Series

ActiveCore Series, 2 Tropical Glass Door Upright Fridge



Project:

Item No:

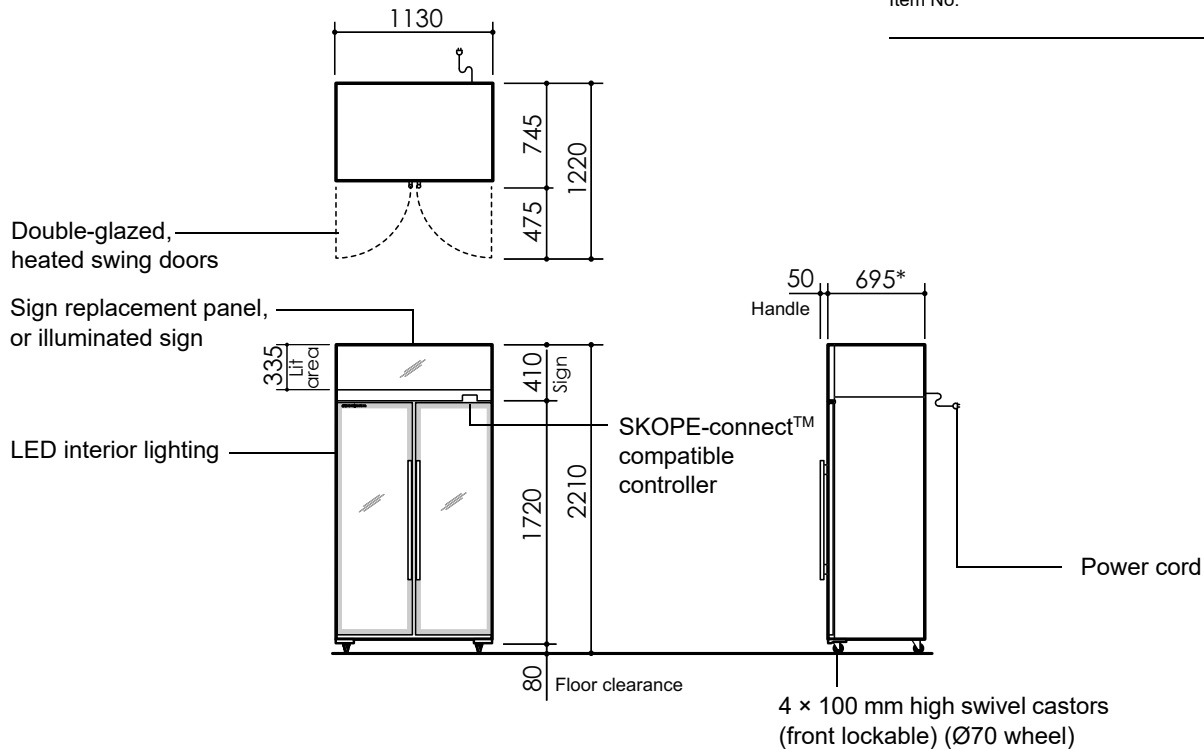

CABINET

Model ID	SKT1000NT-A	SKT1000NT-AC	SKT1000NT-ACX
Doors	2 x heated, self-closing, double-glazed, single low-e, lockable, argon-filled, toughened safety glass swing doors (hinged left hand, right hand)		
Internal door opening	2 x door openings: 1570 mm high x 450 mm wide		
Shelves	10 x adjustable height wire shelves: 500 mm wide x 470 mm deep		
Sign	Sign replacement panel	Illuminated sign	Illuminated sign
Material	Powder-coated galvanised steel or stainless steel interior and exterior		

PERFORMANCE

Max. ambient temperature	40°C
Temperature range	1°C to 4°C (adjustable via SKOPE-connect 1°C to 15°C)
GEMS class	M2
GEMS energy consumption	12.39 kWh/24 h
GEMS annual running cost	\$1,358 p.a. (@ \$0.30/kWh)

ELECTRICAL

Electrical safety climate class	7		
Interior side lighting	2 × 1400 mm, 15 W LED	2 × 1400 mm, 15 W LED	n.a.
Interior shelf lighting	n.a.	n.a.	10 × 415 mm, 6W LED
Sign lighting	n.a.	1 × 1060 mm, 12 W LED	1 × 1060 mm, 12 W LED
Power cord	Supplied with a 10 amp plug and 2.3 m lead		
Power supply	220-240 volts a.c. 50 Hz, single phase supply		
Current draw	6.0 amps (includes unit 2.6 amps)		

REFRIGERATION

Controller	SCS Connect (SKOPE-connect compatible)
Connectivity interface	Bluetooth
Refrigeration system	Top mounted, integral, removable ActiveCore refrigeration unit (UTHCNI-0010)
Refrigerant	R290/99 g (natural refrigerant)
Nominal capacity	740 watts
Heat rejection (avg/peak)	515 watts/605 watts
Drainage	No plumbing required

DIMENSIONS

	External	Internal
Height	2200 mm	1570 mm
Width	1130 mm	1030 mm
Depth	745 mm	555 mm
Floor area	0.84 m ²	
Weight	225 kg	
Gross volume	897 L	

* Depth 695 mm excludes removable door handle and door lock bracket

Dimensional tolerances

Before installing this cabinet allow the following dimensional tolerances:

Linear dimensions	Overall cabinet dimensions	
Less than 1 metre	±5 mm	
More than 1 metre	-5 mm to +10 mm	
	Length of multiple cabinets	
	At each joint	At each end wall
Less than 1 metre	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	+15 mm

Ventilation requirements

Top	300 mm
Sides	Not required
Back	Not required
Bottom	Not required

SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright © 2019 SKOPE Industries Limited

SKOPE INDUSTRIES LIMITED

Australia Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: skope@skope.com, Website: www.skope.com

PSS0601 | Rev. 2.2 Apr. 2024

