

## Three Glass Door Top Mount Upright Fridge

**Range:** ActiveCore Fridge

**SKOPE ID:** NT15GYN

**Dimensions:** 1705 mm (W) × 745 mm (D) × 2200 mm (H)

**Capacity:** 1399 L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_



A high-efficiency, top-mounted, heavy duty, 3-door display fridge suitable for front and back-of-house applications including restaurants, cafés, clubs, pubs, bars, quick service restaurants, and more. Made from powder-coated, galvanised steel with colour options, the cabinet comes complete with five plastic-coated wire shelves per door, easily adjustable via SKOPE's unique ezi-clip and numbered shelf supports. The "frameless" glass doors provide maximum product viewing and are designed for condensation protection in most environments via the double-glazed, argon-filled, low-e, insulated panels. The high impact built-in LED lights can be timed to turn on and off according to your opening times via the free SKOPE-connect smartphone app. A non-illuminated sign panel is included, with space to display your own branding. With M1 compliance, the fridge is engineered to store food and drinks at a standard 1°C to 4°C (adjustable up to 15°C). It is certified under GEMS to the mandatory climate class 3 and is fully tested to operate in ambient environments of up to 40°C (climate class 5). The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge, and low noise output. The top-mounted, fully removable, modular refrigeration cartridge can be easily removed in line with best practice for safe servicing of flammable refrigerants. With the same cartridge being used in both top and bottom-mounted fridges from 600 L to 1500 L, you achieve the fastest possible servicing times with minimal business disruption. The fridge includes a smart controller that connects to the free SKOPE-connect app, enabling you to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty



ActiveCore Technology



Natural Refrigerant



GEMS



SKOPE-connect

© 2023 SKOPE Industries Limited | We reserve the right to alter specifications without notice.


Email: [skope@skope.com](mailto:skope@skope.com)

AUS Freephone: 1800 121 535

NZ Freephone: 0800 947 5673

[skope.com](https://www.skope.com)

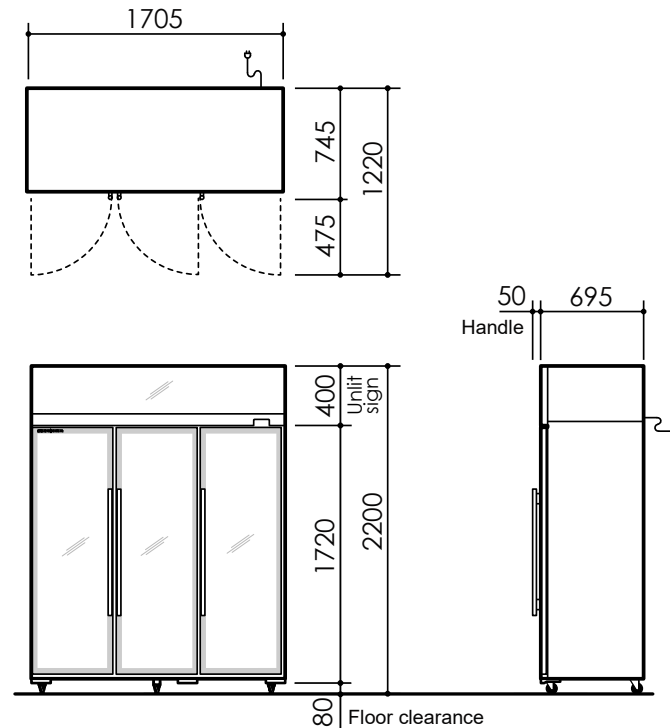

**Cabinet**

<b>Type</b>	TME		
<b>Finish</b>	Powder-coated galvanised steel		
<b>Insulation</b>	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
<b>Doors</b>	Type	Glass swing door (double-glazed, single low-e, argon-filled, toughened, safety glass), tab-locking	
	Opening Size	Height (mm)	1570
		Width (mm)	450
<b>Shelving</b>	Fifteen adjustable height plastic-coated wire shelves 10 × outer shelf (500W × 470D), 5 × inner shelf (570W × 470D)		
<b>Lighting</b>	Sign	n.a.	
	Interior*	3 × 1400 mm, 15 W LED	

**Dimensions†**

	External	Internal	Packed
<b>Width (mm)</b>	1705	1605	TBC
<b>Depth (mm)</b>	745	555	TBC
<b>Height (mm)</b>	2200 (castors)	1570	TBC
<b>Weight (kg)</b>	320		TBC
<b>Capacity (L)</b>	1399		
<b>Footprint (m²)</b>	1.27		

**Ventilation (mm)**

Top	300	Sides	Not required	Rear	Not required
-----	-----	-------	--------------	------	--------------

**Product Loading**

<b>Facing</b>	330 ml can	110	600 ml bottle	110
<b>Loading</b>	330 ml can	770	600 ml bottle	660

**Dimensional Tolerances**

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet		Multiple cabinets	
			At each joint	At each end wall
Less than 1 metre	±5 mm		±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm		-5 mm to +10 mm	+15 mm

**Performance**

<b>Product Temperature Range (°C)</b>	1 to 4 (adjustable* from 1 to 15)		
<b>Maximum Ambient Temperature (°C)</b>	40		
<b>Sound Power Level (dB(A))</b>	Standard	66	
	Hush Mode*	64	

**Greenhouse and Energy Minimum Standards (GEMS)**

<b>Star Rating</b>	7		
<b>Product Temperature Class</b>	M1 (-1 to 5°C)		
<b>Total Energy Consumption</b>	6.10 kWh/24 h		
<b>Annual Running Costs</b>	\$668 (@ \$0.30/kWh)		

**Electrical**

<b>Supply</b>	220-240 volts a.c., 50 Hz, single phase supply		
<b>Cord</b>	2.3 m power cord with 3-pin, 10 amp plug		
<b>Current draw (A)</b>	3.4		

**Refrigeration**

<b>Controller</b>	SCS Connect (SKOPE-connect™ compatible)		
<b>System Type</b>	Removable cartridge		
<b>Cartridge Weight (kg)</b>	28		
<b>Refrigerant/Charge</b>	R290/99 g		
<b>Nominal Capacity (W)</b>	680 (EN12900 MBP)		
<b>Heat Rejection (W)</b>	Average	265	Peak 350
<b>Defrost Type</b>	Automatic, off-cycle		
<b>Drainage</b>	No plumbing required		

\* Accessible via the free SKOPE-connect™ app.



TME1500N-A  
on the SKOPE website