

specifications

BB780Xr-4SW


BackBar X Remote Four Door Chiller
Type: RB2414

CABINET DIMENSIONS

	External	Internal
Height:	920mm*	758mm
Width:	2475mm	2140mm
Depth:	590mm	530mm
Floor area:	1.46m ²	


* Height excludes castors, legs and optional worktop.

*Height variation	
Supplied height adjustable castors	1015mm - 1030mm
Supplied height adjustable legs	1050mm - 1080mm
No castors or legs	920mm

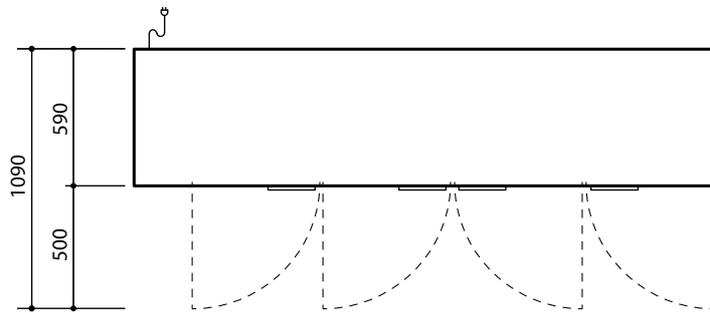

Carel S4 electronic controller

LED horizontal top light

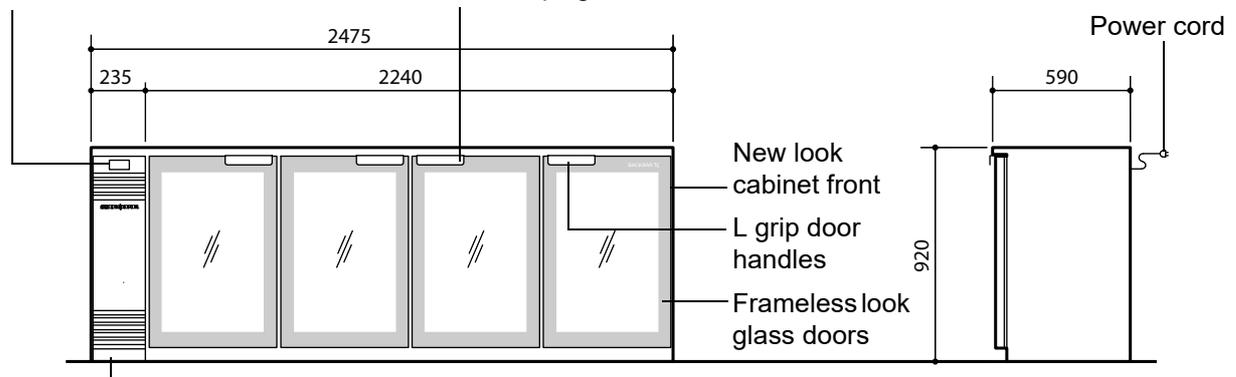

Side mounted remote refrigeration unit

Copyright © 2016 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system:	Electronically controlled, side mounted, remote refrigeration unit (UE40ABR-100IC), with isolation switch
Electronic controller:	Carel S4 Evo
Refrigerant:	Thermostatic expansion valve fitted as standard to suit R134a or R404A
Remote refrigeration duty:	750 Watts
Cabinet internal volume:	780 litres
Cabinet temperature range:	2°C to 4°C (product mass average)
Climate class:	5
Drainage:	Evaporator drain fitted inside service compartment (requires plumbing)
Electrical:	220-240 Volts a.c. 50 Hz, single phase supply, 1.4 Amps (unit 0.2 Amps)
Internal lighting:	1 x 24W T8 Frosted LED Tube (Ø26 x 1500mm, 5500K) - Switched
Internal door opening size:	4 door openings: 720mm high x 470mm wide
Doors:	4 x self-closing, double glazed, toughened, single Low-E safety glass, frameless look doors. Optional door locks.
Worktop (optional):	Optional 25mm stainless steel worktop
Shelves:	Two adjustable height shelves per door: 495/555mm wide x 440mm deep
Total weight:	200kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0443 Rev. 2.1 Feb.2020



SKOPE INDUSTRIES LIMITED



New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533

Email: enquiry@skope.co.nz Website: www.skope.co.nz