


specifications

PG1300VCr


SKOPE Pegasus Vertical Chiller
REMOTE 2 Door (RH12PV)

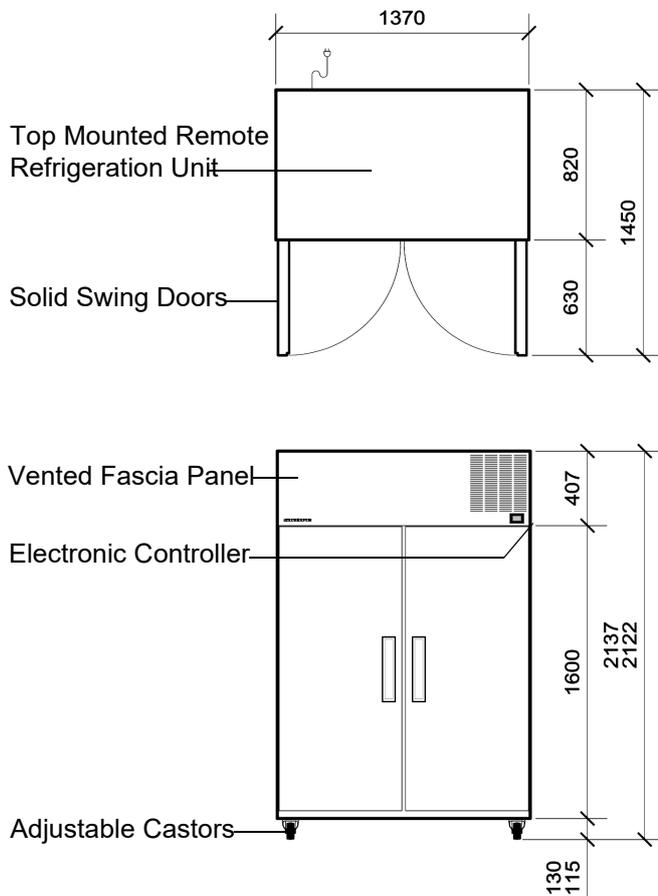

CABINET DIMENSIONS

	External	Internal
Height:	2122mm - 2137mm	1520mm
Width:	1370mm	1250mm
Depth:	820mm	650mm
Floor area:	1.11m ²	

Dimensional tolerances	
Before installing this cabinet allow the following dimensional tolerances:	
Linear dimensions	Overall cabinet dimensions
Less than 1 metre	±5mm
More than 1 metre	-5mm to +10mm
Length of multiple cabinets	
At each joint	At each end wall
±5mm	+15mm
-5mm to +10mm	+15mm

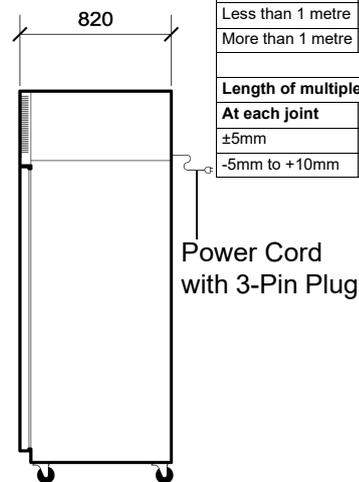

Copyright © 2013 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system:	Electronic controlled, top mounted, removable remote refrigeration unit
Refrigeration unit model:	UT40AGR
Refrigerant:	Thermostatic expansion valve fitted to suit R134a/R404A/452A
Pipe connection size:	Liquid line: 1/4". Suction line: 3/8"
Remote refrigeration duty:	1000 Watts
Cabinet internal volume:	1298 litres
Insulation:	60mm thick, high density cyclo-isopentane polyurethane foam
Cabinet temperature range:	+1°C to +4°C up to 43°C ambient
Drainage:	A condensate drain must be run from the cabinet to a waste outlet.
Electrical:	230-240 Volts a.c. 50 Hz, 1.0 Amps
Interior lighting:	1 interior light: 20 Watt T8 LED tube (Ø26 × 1200mm) - Door activated
Internal door opening size:	2 door openings: 1520mm high × 565mm wide
Doors:	Solid, stainless steel, self-closing doors (with key lock) - LH & RH hinged
Shelves:	5 levels of non-tip, adjustable tray slides and/or shelves 530mm × 650mm
Weight:	210 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0362 Rev. 1.2 Nov. 2019



SKOPE INDUSTRIES LIMITED

Australian Freephone: 1800 121 535, New Zealand Freephone: 0800 947 5673

Email: enquiry@skope.co.nz, Website: www.skope.com

