

## Two Glass Sliding Door BackBar

**Range:** BackBar

**SKOPE ID:** BB012

**Dimensions:** 1485 mm (W) × 600 mm (D) × 1025 mm (H)\*

**Capacity:** 410 L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_

\* Height with castors is adjustable from 1015 to 1035.



A glass door under-bar fridge designed to merchandise ready-to-serve cold beverages in bars, restaurants, clubs, pubs, and cafés. Engineered to serve cold drinks at 1°C to 4°C (or adjustable up to 15°C) in ambient environments of up to 32°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The glass doors are designed for condensation protection in most environments via the double-glazed, argon-filled low-e insulated panels and heated fascia. Sliding door locks are optional. The built-in LED lights provide optimum merchandising and can be dimmed or timed to turn on and off via a free smartphone app. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



**Warranty**




**Natural Refrigerant**



**GEMS**



**SKOPE-connect**

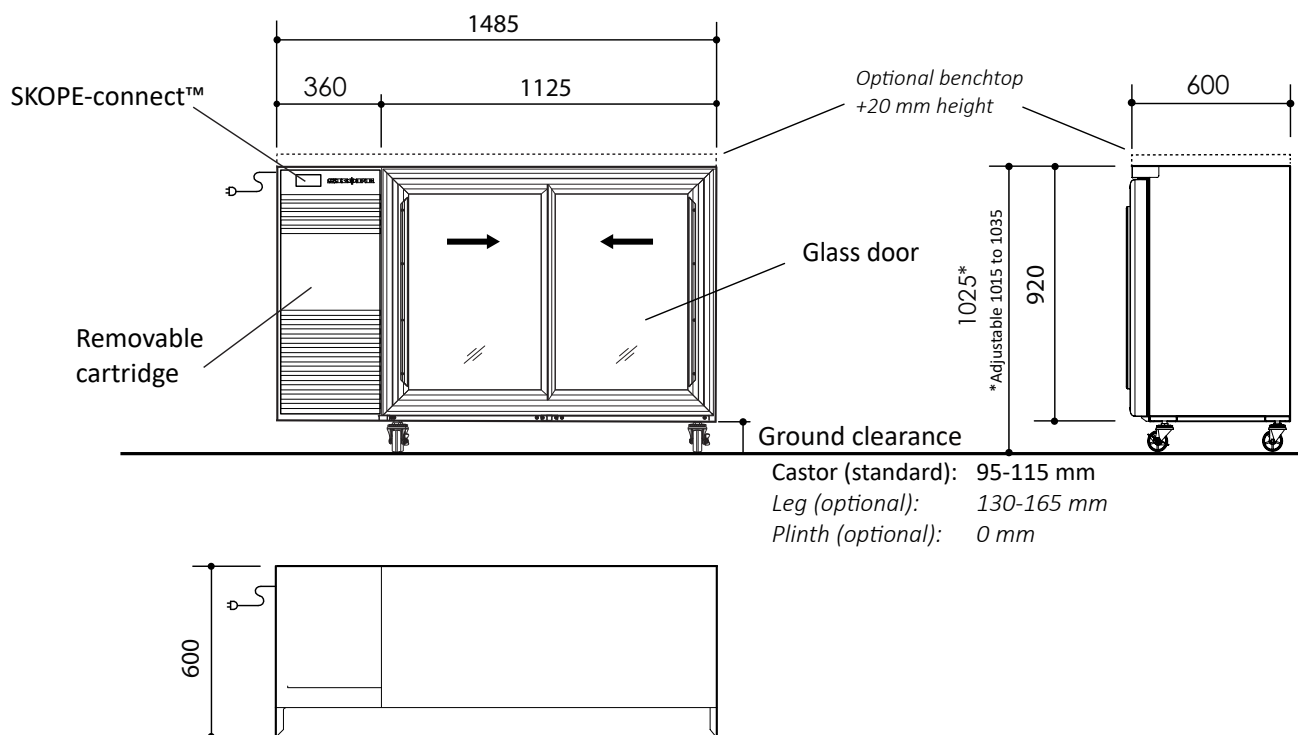

## Cabinet

Type	BackBar		
Finish	Powder-coated galvanised steel or stainless steel		
Insulation	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
Doors	Type	Glass sliding door (double-glazed, low-e, argon-filled)	
	Opening Size	Height (mm)	730
		Width (mm)	460
Shelving	Four adjustable height powder-coated wire shelves 4 × outer shelf (497W × 440D)		
Lighting*	1 × 16 W dimmable, cool white (5500-6500K) LED strip on cabinet ceiling		

## Dimensions†

	External	Internal	Packed
Width (mm)	1485	1020	1490
Depth (mm)	600	530	605
Height (mm)	1015 to 1035 (standard castors) 920 (plinth mount)	758	1048
Weight (kg)	180		195
Capacity (L)	410		
Footprint (m²)	0.89		

## Ventilation (mm)

Top	Not required	Sides	Not required	Rear	Not required
-----	--------------	-------	--------------	------	--------------

## Product Loading

Facing	330 ml can	28	600 ml bottle	28
Loading	330 ml can	168	600 ml bottle	168

\* Accessible via the free SKOPE-connect™ app.

† Allow for dimensional tolerances when installing the cabinet(s).

## Performance

Product Temperature Range (°C)	1 to 4 (adjustable* from 0 to 15)	
Maximum Ambient Temperature (°C)	32	
Sound Level (dB(A))	Standard	< 66
	Hush Mode*	< 62

## Greenhouse and Energy Minimum Standards (GEMS)

Star Rating	6
Product Temperature Class	M1 (-1 to 5°C)
Total Energy Consumption	4.98 kWh/24 h
Annual Running Costs	\$545 (@ \$0.30/kWh)

## Electrical

Supply	220 to 240 volts a.c., 50 Hz, single phase supply
Cord	1.9 power cord with 3-pin, 10 amp plug
Current draw (A)	2.6

## Refrigeration

Controller	SCS Connect (SKOPE-connect™ compatible)			
System Type	Removable cartridge			
Cartridge Weight (kg)	24			
Refrigerant/Charge	R290/81 g			
Nominal Capacity (W)	650			
Heat Rejection (W)	Average	210	Peak	220
Defrost Type	Automatic, off-cycle			
Drainage	No plumbing required			



BB.2.GSL  
on the SKOPE website