


## Three Glass Swing Door SlimLine

**Range:** BackBar  
**SKOPE ID:** SLO03  
**Dimensions:** 2195 mm (W) × 590 mm (D) × 830 mm (H)\*  
**Capacity:** 448 L

**Project:** \_\_\_\_\_

**Item #:** \_\_\_\_\_

\* Height with castors is adjustable from 820 to 840.

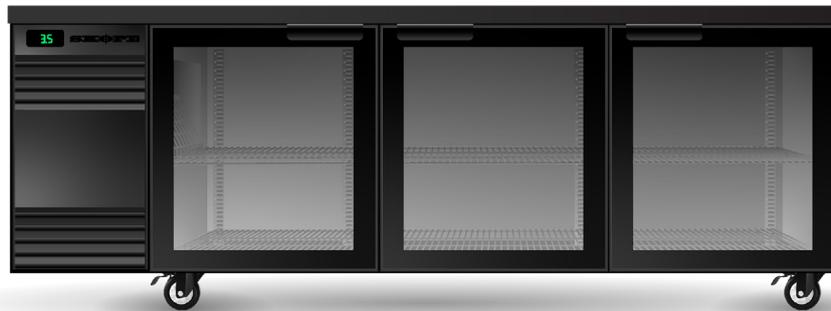

A glass door under-counter bar fridge designed to merchandise ready-to-serve cold beverages in bars, restaurants, clubs, pubs, and cafés. Engineered to serve cold drinks at 1°C to 4°C (or adjustable up to 15°C) in ambient environments of up to 40°C. Made from powder-coated, galvanised steel with colour options, it can also be upgraded to full stainless-steel construction. The ‘frameless’ glass doors provide maximum product viewing and are designed for condensation protection in most environments via the double-glazed, argon-filled low-e insulated panels and heated fascia. For high humidity tropical environments heated glass versions are available. The doors and cabinet are fitted with built-in retractable tabs to enable locking via padlock. The built-in LED lights provide optimum merchandising and can be dimmed or timed to turn on and off via a free smartphone app. The fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output and can be provided in remote versions. The side-mounted fully removable refrigeration cartridge (with left and right options) is front-breathing and can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge includes a controller that connects to a free app to enable the user to set temperatures and alerts, monitor temperatures and energy, and more. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.



Warranty




Natural Refrigerant



GEMS



SKOPE-connect

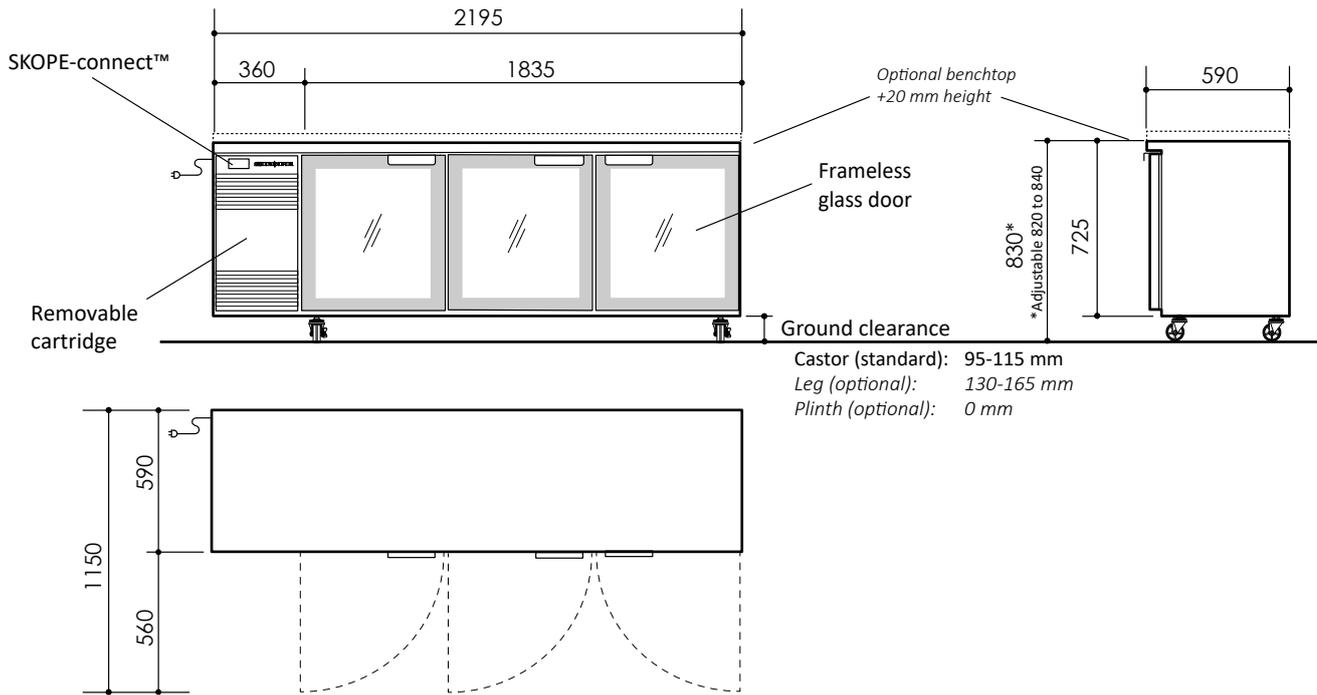

### Cabinet

<b>Type</b>	SlimLine		
<b>Finish</b>	Powder-coated galvanised steel or stainless steel		
<b>Insulation</b>	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (C5H10/C5H12)	
<b>Doors</b>	Type	Glass swing door (double-glazed, low-e, argon-filled)	
	Opening Size	Height (mm)	538
Width (mm)		511	
<b>Shelving</b>	Six adjustable height powder-coated wire shelves		
	4 × outer shelf (547W × 440D), 2 × inner shelf (605W × 440D)		
<b>Lighting*</b>	1 × 24 W, cool white (5500-6500K) LED strip on cabinet ceiling		

### Dimensions†

	External	Internal	Packed
<b>Width (mm)</b>	2195	1730	TBC
<b>Depth (mm)</b>	590	475	TBC
<b>Height (mm)</b>	820 to 840 (standard castors)	545	TBC
	725 (plinth mount)		
<b>Weight (kg)</b>	207		TBC
<b>Capacity (L)</b>	448		
<b>Footprint (m<sup>2</sup>)</b>	1.3		

### Ventilation (mm)

Top	Sides	Rear
Not required	Not required	Not required

### Product Loading

	Facing	Loading
330 ml can	50	300
600 ml bottle	44	264

\* Accessible via the free SKOPE-connect™ app.

† Allow for dimensional tolerances when installing the cabinet(s).

### Performance

<b>Product Temperature Range (°C)</b>	1 to 4 (adjustable* from 0 to 15)
<b>Maximum Ambient Temperature (°C)</b>	40
<b>Sound Level (dB(A))</b>	Standard < 66
	Hush Mode* < 62

### Greenhouse and Energy Minimum Standards (GEMS)

<b>Star Rating</b>	9
<b>Product Temperature Class</b>	M1 (-1 to 5°C)
<b>Total Energy Consumption</b>	2.50 kWh/24 h
<b>Annual Running Costs</b>	\$274 (@ \$0.30/kWh)

### Electrical

<b>Supply</b>	220-240 volts a.c., 50 Hz, single phase supply
<b>Cord</b>	1.9 power cord with 3-pin, 10 amp plug
<b>Current draw (A)</b>	2.6

### Refrigeration

<b>Controller</b>	SCS Connect (SKOPE-connect™ compatible)
<b>System Type</b>	Removable cartridge
<b>Cartridge Weight (kg)</b>	24
<b>Refrigerant/Charge</b>	R290/81 g
<b>Nominal Capacity (W)</b>	650
<b>Heat Rejection (W)</b>	Average 105 Peak 130
<b>Defrost Type</b>	Automatic, off-cycle
<b>Drainage</b>	No plumbing required



SL.3.GSW  
on the SKOPE website