


specifications

OD720N

SKOPE Open Deck Chiller

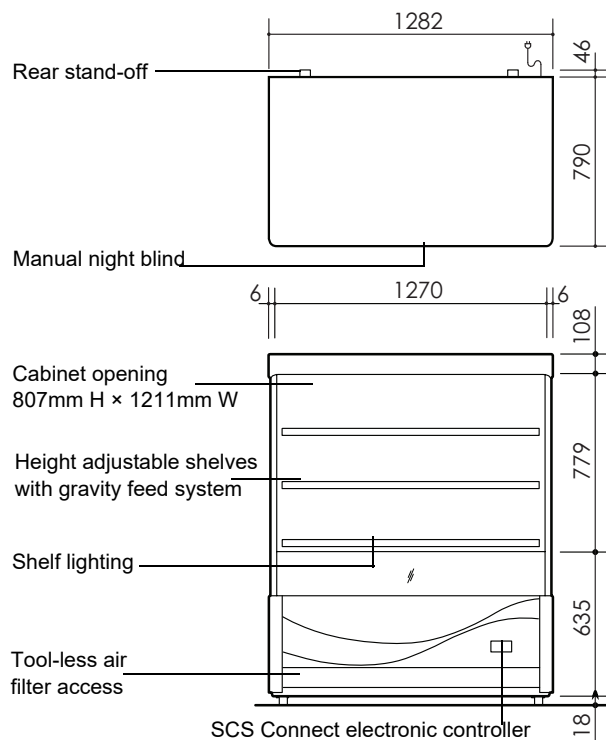

CABINET DIMENSIONS

	External	Internal
Height:	1540mm	1058mm
Width:	1282mm	1191mm
Depth:	836mm*	633mm
Floor area:	1.07m ² (includes stand-off)	

* Depth of 836mm includes 46mm rear stand-off

Dimensional tolerances	
Before installing this cabinet allow the following dimensional tolerances:	
Linear dimensions	Overall cabinet dimensions
Less than 1 metre	±5mm
More than 1 metre	-5mm to +10mm
Length of multiple cabinets	
At each joint	At each end wall
±5mm	+15mm
-5mm to +10mm	+15mm

Full height powder coated metal sides with 22mm thick window

Mains flex

Bottom mounted R290 refrigeration cartridge (removed from front)

Copyright © 2020 SKOPE Industries Limited

CABINET SPECIFICATIONS

Refrigeration system:	R290 (hydrocarbon) Open Deck Cartridge (UBQENI-0034)
Electronic controller:	Wellington Drive SCS Connect
Connectivity interface:	Bluetooth
Refrigerant:	R290 / 135g
Temperature range:	-1°C to +5°C
TCCC class:	A
Electrical safety climate class:	3
GEMS energy consumption:	16.15 kWh/24h
GEMS star rating:	3
Electrical:	220-240 Volts a.c. 50 Hz, single phase supply. Supplied with 10 Amp 3-Pin plug
Current draw:	4.8 Amps (unit 4.0 Amps)
Nominal capacity:	1700 Watts
Sign lighting:	n.a.
Internal lighting:	4 x 7.5 W LED shelf lights
Shelves:	3 adjustable angle (8° or flat), adjustable height shelves + 1 fixed angle (8°) bottom shelf. Fitted with gravity feed system and shelf lighting
Product loading:	4 layers of 600ml PET bottles. Top and middle shelves: 14 facings x 5 deep, bottom shelf: 14 facings x 6 deep. 294 per cabinet
Gross volume:	798 litres
Weight:	248 kg

SKOPE Industries Limited reserves the right to alter specifications without notice.

PSS0670 Rev. 1.2 May 2021